



Drago Mono Amplifiers

- Link 2 DRAGO Amps Together to Double Power • Up to 10,000 Watts RMS Power when linked • Low Pass Crossover • Low Pass Filter • Subsonic Filter • Bass Boost

Model	Chs/Class	RMS	Maximum	MIN Ohm
D5K	1/D	2600 Watts x 1	5000 Watts	1 Ohm
D6K	1/D	3000 Watts x 1	6000 Watts	1 Ohm
D10K	1/D	5000 Watts x 1	10000 Watts	1 Ohm



D Block Amplifiers

- Full Range Class A/B Amplifiers • Mosfet Power Supply • Brushed Aluminum "Finless" Heat Sink • Adjustable Low & High Pass Filter • 6-Way Protection Circuitry • Adjustable Parametric Bass Equalizer

Model	Channels	RMS	Maximum	MIN Ohm
D800.4	2	120 Watts x 4	480 Watts x 2	2 Ohm
DBX4	2	250 Watts x 4	4000 Watts x 1	2 Ohm Stereo/4 Ohm Mono



Nano-BLU Amplifiers


- Class-D Full Range with Micro Circuit Topology • Built-in Bluetooth • Full Mosfet with High Grade Switching Devices • Noise Reduction Circuitry • Mil Spec Double-Sided PCB with SMD Parts • 5-Way Protection Circuitry • RCA Inputs • Small Footprint

Model	Channels	RMS	Maximum	MIN Ohm
BLX2	2	120 Watts x 2	480 Watts x 1	4 Ohm
BLX4	4	120 Watts x 4	480 Watts x 2	4 Ohm
BLX5	4	120 Watts x 4 + 600 Watts	480 Watts x 2	4 Ohm
BL1	1	800 Watts x 1	1600 Watts x 1	1 Ohm
RAILCAP-BLX				Rail Cap Booster



D Block Mono Amplifiers

Model	Channels	RMS	Maximum	MIN Ohm
D2400	1	1200 Watts	2400 Watts	1 Ohm
D3600	1	1800 Watts	3600 Watts	1 Ohm
D8000	1	4000 Watts	8000 Watts	0.5 Ohm



Nano Edge Amplifiers

- Full Mosfet with Hi-Grade Switching • Built-in Noise Rejection Circuitry • Bass Boost
- Next Gen Advanced 5-Way Protection • 12 Volt Remote Output for External Devices

Model	Chs/Class	RMS @ 4Ω	Maximum	MIN Ohm
EX2	2/AB	120 Watts x 2	480 Watts	1 Ohm
EX44	4/AB	100 Watts x 4	400 Watts x 2	1 Ohm
EX46	4/D	150 Watts x 4	600 Watts x 2	1 Ohm
EX48	4/D	200 Watts x 4	800 Watts x 2	1 Ohm



Model	Chs/Class	RMS @ 1Ω	Maximum	MIN Ohm
EX5	5/D	120W x 4 + 800W x 1	480W x 2 + 1600W x 1	1 Ohm
E2	1/D	800 Watts x 1	1600 Watts	1 Ohm
E3	1/D	1400 Watts x 1	2800 Watts	1 Ohm
E4	1/D	2000 Watts x 1	4000 Watts	1 Ohm
RAILCAP-E	Custom Capacitor Bank Exclusively for EDGE with Molex Plug			





NANO-BLU Marine Amplifiers

Model	Channels	RMS	Maximum	MIN Ohm
BL2-M	1	800 Watts x 1	1600 Watts x 1	1 Ohm
BLX2-M	2	240 Watts x 2	480 Watts x 1	2 Ohm
BLX44-M	4	240 Watts x 4	800 Watts x 2	2 Ohm
BLX5-M	4	240 Watts x 1 + 600Watts	480 Watts x 2 + 1200 Watts	2 Ohm



Blade Amplifiers

- Full Mosfet with High Grade Switching • Built-in Noise Rejection Circuitry • Bass Boost
- HPF/LPF/Full Range Crossovers • Next Gen Advanced 5-Way Protection • 12 Volt Remote Output for External Devices • Up to 10 Volt Input via RCA or Speaker Leads

Model	Chs/Class	RMS @ 4Ω	Peak	MIN Ohm
B500.2	4/AB	80 Watts x 4	250 Watts x 4	2 Ohm
B1000.4	4/AB	80 Watts x 4	250 Watts x 4	2 Ohm
B1500.4	4/AB	120 Watts x 4	375 Watts x 4	2 Ohm
B2000.4	4/AB	150 Watts x 4	500 Watts x 4	2 Ohm
B2000.5	4/AB	600W x 1 @ 2Ω/160W x 4 @ 2Ω	-	2 Ohm
Model	Chs/Class	RMS @ 2Ω	Peak	MIN Ohm
B1000.1	1/AB	455 Watts x 1	1000 Watts x 1	2 Ohm
B2000.1	1/D	1000 Watts x 1 @ 1Ω	2000 Watts x 1	1 Ohm



RAILCAP-B Custom Capacitor Bank Exclusively for BLADE with Molex Plug

"Blade" BP Series Amplifiers

- Built-In OEM Line Converter • Mil Spec PCB with SMD parts • Built-in Noise Reduction Circuitry
- Full MOSFET with High Grade Switching Devices • Built-In Auto Sensing Turn On Function (Hi-Inputs)



Model	Chs/Class	4 Ohm RMS	2 Ohm RMS	Peak	MIN Ohm
BP500.2	2/AB	80 Watts x 2	160 Watts x 2	80 Watts x 2	2 Ohm
BP1000.2	2/AB	160 Watts x 2	240 Watts x 2	500 Watts x 2	2 Ohm
BP1500.2	2/AB	240 Watts x 2	480 Watts x 2	750 Watts x 2	2 Ohm
BP800.4	4/AB	60 Watts x 4	120 Watts x 4	200 Watts x 4	2 Ohm
BP1000.4	4/AB	80 Watts x 4	160 Watts x 4	250 Watts x 4	2 Ohm
BP1500.5	5/AB	80 Watts x 4 + 500 Watts x 1	160 Watts x 4 + 500 Watts x 1	240 Watts x 4 + 500Watts	2 Ohm
BP600.1	1	150 Watts x 1	300 Watts x 1	600 Watts x 1	2 Ohm
BP1000.1	1	250 Watts x 1	455 Watts x 1	1000 Watts x 1	2 Ohm
BP1200.1	1/D	300 Watts x 1	500 Watts x 1	1200 Watts x 1	1 Ohm
BP2000.1	1/D	500 Watts x 1	900 Watts x 1	2000 Watts x 1	2 Ohm
BP4000.1	1	1000 Watts x 1	2000 Watts x 1	4000 Watts x 1	2 Ohm
BP6000.1	1	1500 Watts x 1	3000 Watts x 1	6000 Watts x 1	2 Ohm
BP-PS100	Amplifier Power Supply				

Universal Wiring Adapter

UW-1 – The Massive Audio UW-1 universal RCA adapter is used to activate the ATO (auto turn on) feature in all Blade, Blade BP, Edge, Nano BLU, Nano BLU-M Marine and the "D" Block DBX4 amplifiers.





Hi-Low Convertors/Bluetooth Summing Electronic Crossovers

TRI-XO – 3-Way Active X-over w/Subwoofer Control, 18dB per Octive w/Gain Remote

B-LYNX – OEM 4 Channel Line Converter, BT Streaming with UBT1, 10Hz - 80Khz

UBT-1 – Bluetooth Dongle for **B-LYNX**, **NANO-BLU**

HI-LOW– High/Low Line Converter, 2 Channel Operation, 12 Volt Remote Output



Signal Processor

EQ7 – 1/2 DIN, 7 Band Stereo Equalizer, 8v Line Driver, AUX Input

Amplifier Optional Remote Gain

UR1 – Optional Gain Remote Knob

Amplifier Wiring Kits

• Amplifier Hookup Kits Provide everything you need in one kit, all necessary Wire, Fuses, and Terminals in one Package • Wires are Oxygen Free Pure 100% Copper Cable • Signal Cables use Custom Molded RCA Plugs



Model	Power/Ground	Speaker	Turn-On	RCA	Fuse
AK-4	4 AWG	16 AWG	18 AWG	17 ft.	150A
AK-0	0 AWG	16 AWG	18 AWG	17 ft.	300A
G4	4 AWG	16 AWG	18 AWG	17 ft.	150A
G8	8 AWG	16 AWG	18 AWG	17 ft.	60A

Gordo Subwoofers

• Kevlar Fiber Enhanced Non-Pressed Paper Cone with Textured Paint Finish
• EROM Foam Surround w/Red Stitching • Die Cast Basket w/Black Textured Finish • 4" 4 Layer Hi-Temp Flat Aluminum Wire Voice Coil • Customized Rubber Gasket & Magnet Boot • 10 GA. Power Cable w/Direct Lead Connection



Model	Size	Power RMS/Peak	Impedance	Magnet
GORDO 121	12"	3000W/6000W	Dual 1 Ohm	450 oz.
GORDO 151	15"	3000W/6000W	Dual 1 Ohm	450 oz.
GORDO 181	18"	3000W/6000W	Dual 1 Ohm	450 oz.

Hippo Subwoofers

• 4000 Watt Deep Cycle Cast Basket Subwoofers • Light Weight/Heavy Duty Fiber/Non-Pressed Paper Cone • 3" Voice Coil • Push Pin Style Terminals



Model	Size	Power RMS/Peak	Impedance	Magnet
HIPPOXL 122R	12"	500W/1000W	Dual 4 Ohm	100 oz.
HIPPOXL 122*	12"	2500W/5000W	Dual 2 Ohm	405 oz.
HIPPOXL 152*	15"	2500W/5000W	Dual 2 Ohm	405 oz.
HIPPOXL 84	8"	500W/1000W	Dual 4 Ohm	100 oz.
HIPPOXL 64	6"	300W/600W	Dual 4 Ohm	90 oz.
HIPPO 84	8"	500W/1000W	Dual 4 Ohm	100 oz.

*Product requires signed Warranty Acknowledgement Form



Summo Subwoofers

- Kevlar Fiber Enhanced Non-Pressed Paper Cone with Textured Paint Finish
- EROM Foam Surround w/Red Stitching • Die Cast Basket w/Black Textured Finish • 4 Layer High-Temp Voice Coil • Customized Rubber Gasket and Magnet Boot • 16 or 10 GA. Power Cable with Direct Lead Connection

Model	Size	Power RMS/Peak	Impedance	Magnet
SUMMO 64	6"	150W/300W	Single 4 Ohm	48 oz.
SUMMO 84	8"	300W/600W	Dual 4 Ohm	90 oz.
SUMMOXL 104	10"	1500W/3000W	Dual 4 Ohm	225 oz.
SUMMOXL 124	12"	2000W/3000W	Dual 2 Ohm	250 oz.
SUMMOXL 154	15"	1500W/3000W	Dual 4 Ohm	225 oz.



MMA Subwoofers

- UV Treated Laminated Paper Cones • EROM Foam Surround w/Red Stitching
- Heavy Gauge Steel Basket • 2.5" 4 Layer High-Temp Voice Coil • Customized Rubber Gasket • Poly Cotton Spider w/Woven Round Tinsel Leads

Model	Size	Power RMS/Peak	Impedance	Magnet
MMA 104	10"	500W/1000W	Dual 4 Ohm	70 oz.
MMA 124	12"	500W/1000W	Dual 4 Ohm	70 oz.



Torox Subwoofers

- Deep Cycle Cast Basket • CEA 2031 Certified • 3" 4 Layer Voice Coil

Model	Size	Power RMS/Peak	Impedance	Magnet
TOROX 104	10"	1000W/2000W	Dual 4 Ohm	180 oz.
TOROX 122	12"	1000W/2000W	Dual 2 Ohm	180 oz.
TOROX 124	12"	1000W/2000W	Dual 4 Ohm	180 oz.
TOROX 154	15"	1000W/2000W	Dual 4 Ohm	180 oz.



UFO Subwoofers

- Shallow Mount Stamped Steel Basket

Model	Size	Power RMS/Peak	Impedance	Magnet
UFO 10	10"	300W/600W	Dual 4 Ohm	40 oz.
UFO 12	12"	300W/600W	Dual 4 Ohm	50 oz.



GTX Subwoofers

- UV Treated/Non-Pressed Paper Cone with EROM Foam Surround • Heavy Gauge Steel Basket with Industrial Texture Painting • Customized Rubber Gasket & Magnet Boot • 2.5" 4 Layer Hi-Temp Voice Coil • 10mm Top Plate
- Poly Cotton Spider w/Woven Round Tinsel Leads • Strontium Ferrite Magnets

Model	Size	Power RMS/Peak	Impedance	Magnet
GTX 102	10"	700W/1400W	Dual 2 Ohm	120 oz.
GTX 104	10"	700W/1400W	Dual 4 Ohm	120 oz.
GTX 122	12"	700W/1400W	Dual 2 Ohm	120 oz.
GTX 124	12"	700W/1400W	Dual 4 Ohm	120 oz.
GTX 124R*	12"	1000W/2000W	Dual 4 Ohm	120 oz.
GTX 154	15"	700W/1400W	Dual 4 Ohm	120 oz.





TKO Subwoofers

• Stitched Pressed Paper Cone • 1" Roll Polyester Foam Surround • Custom Designed Stamped Steel Basket with Heavy Powder Coat Finish • 2" Voice Coils on Aluminum Former with Reinforced Neck Joint • Black E-Coated Magnetic Plates • Poly Cotton Spider with Woven Round Tinsel Lead Wire

Model	Size	Power RMS/Peak	Impedance	Magnet
TKO 104	10"	300W/600W	Dual 4 Ohm	50 oz.
TKO 124	12"	300W/600W	Dual 4 Ohm	50 oz.
TKO 12-S4	12"	300W/600W	Single 4 Ohm	50 oz.



ECO Subwoofers

Model	Size	Power RMS/Peak	Impedance	Magnet
ECO 12-S4	12"	250W/500W	Single 4 Ohm	45 oz.



ZK & XK Hi-Quality Component Speakers

• Woven Fiber Coating Paper Cone with Butyl Rubber Surround • Custom Cast Aluminum Baskets w/Thick Powder Coating • 1.25" Hi-Temperature KSV Voice Coil • 25mm Silk Diaphragm Tweeters w/Ferro Fluid Cooled VC

Model	Size	Power RMS/Peak	Impedance
ZK 6	6.5"	200W/400W	4 Ohm
Z6 R	6.5"	200W/400W	4 Ohm



M Midrange Speakers

• Paper Cones • Cloth Surrounds • CCAW Copper Voice Coils • Stamped Steel Basket • Flat Foam Surrounds • Ferro Fluid Cooled • Vented and Extended Cores • Kapton Coil Formers

Model	Size	Power RMS/Peak	Impedance
M6	6.5"	140W/300W	8 Ohm
M8	8.2"	150W/300W	8 Ohm
M10	10"	150W/300W	8 Ohm



MB & MA Mid Bass Speakers

• Paper Cones • Cloth Surrounds • CCAW Copper Voice Coils • Stamped Steel Basket • Flat Foam Surrounds • Ferro Fluid Cooled • Vented and Extended Cores • Kapton Coil Formers

Model	Size	Power RMS/Peak	Impedance
MB6	6.5"	150W/300W	8 Ohm
MB8	8"	175W/350W	8 Ohm
MA6	6"	140W/350W	8 Ohm
MA8	8"	150W/350W	8 Ohm





MK Series Component Speakers

- Heavy Gauge Steel Shallow Mount Basket • Ferrite Magnet (midrange)
- Neodymium Magnets (tweeters) • Custom Rubber Surround with Coated Paper Cone • Phase-Optimized Designed 12dBt Crossovers

Model	Size	Power RMS/Peak	Tweeter
MK5	5.25" 2-Way	140W/280W	25mm Silk Dome
MK6	6.5" 2-Way	150W/300W	25mm Silk Dome
M6R	6.5" 2-Way	150W/300W	-



PK & PX Series Component Speakers

- Cast Aluminum Basket • High Grade Ferrite Magnets (midrange)
- UV Treated Paper Cones w/Custom Cloth Surrounds • Phase optimized Hi-Grade 6dB per Octave X-overs • Included Protective Paintable Grills

Model	Size	Power RMS/Peak	Tweeter
PK6S	6.5"	250W/500W	25mm Aluminum
P65X	6.5"	120W/240W	25mm Aluminum
P69X	6X9"	140W/280W	25mm Aluminum



LX Coaxial Speakers

- New LX Series High Power Speakers • Ultra-Light Injected PP Cones
- Supple Surgical Rubber Surrounds • Pure German Silk 20mm Swivel Dome Tweeters • Stamped Steel Baskets • 25mm-35mm ASV Voice Coils

Model	Size	Power RMS/Peak	Impedance	Tweeter
LX4	4" 2-Way	50W/220W	4 Ohm	20mm Swivel
LX46	4 x 6", 2-Way	60W/250W	4 Ohm	20mm Swivel



MX Coaxial Speakers

- Laminated Paper Cone with Butyl Rubber Surround • Heavy Gauge Steel Powder Coated Basket • 1" High Temperature KSV Voice Coil

Model	Size/Type	Power RMS/Peak	Impedance
MX2	2" 2-Way	20W/40W	4 Ohm
MX3	3" 2-Way	30W/60W	4 Ohm
MX4	4" 2-Way	40W/80W	4 Ohm
MX5	5.25" 2-Way	40W/80W	4 Ohm
MX65	6.5" 2-Way	60W/120W	4 Ohm
MX65S*	6.5" 2-Way	60W/120W	4 Ohm
MX46	4 x 6" 2-Way	40W/80W	4 Ohm
MX57	5 x 7" 2-Way	50W/100W	4 Ohm
MX693	6 x 9" 3-Way	60W/250W	4 Ohm

*Shallow



M Pro Audio Closed Back Shallow Mount

Model	Size	Power RMS/Peak	Impedance
M6C	6.5" Midrange	70W/140W	8 Ohm
M8C	8" Midrange	80W/160W	8 Ohm
M69C	6 x 9" Midrange	60W/240W	8 Ohm
M57C	5 x 7" Midrange	50W/200W	8 Ohm





MC Mid-Range/Bass Pro Audio Speakers

Model	Size	Power RMS/Peak	Impedance
MC 8II	8" Midrange	400W/800W	8 Ohm
MC 10II	10" Midrange	400W/800W	8 Ohm
MC 12II	12" Midrange	400W/800W	8 Ohm



M Pro Audio Shallow Mount Speakers

Model	Size	Power RMS/Peak	Impedance
MB6C	6.5" Midrange	150W/300W	8 Ohm
M6S	6.5" Midrange	130W/300W	4 Ohm
M8S	8" Midrange	140W/300W	4 Ohm



CT Pro Audio Compression Drivers


Model	Description	RMS/Max Power/Imp
CT4	1" VC, Super Tweeter, Neodymium Magnet	30 Watts/120 Watts - 4 Ohm
CT6	1.75" VC, Super Tweeter, Ferrite Magnet	60 Watts/300 Watts - 8 Ohm



CT Tweeters

• 12 dB Crossovers • Neodymium Magnets • Surface or Flush Mount

Model	Description	Power RMS/Max
CT1	25mm, Silk Soft Dome Tweeter	60 Watts RMS/110 Watts Max
CT1A	25mm, Aluminum Dome Tweeter	60 Watts RMS/120 Watts Max
CT2II	28mm, Silk Dome Tweeter	80 Watts RMS/160 Watts Max
CT30	30mm, Silk Dome Tweeter	60 Watts RMS/120 Watts Max

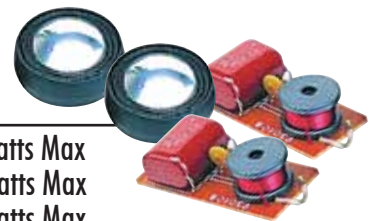

MT/T Pro Audio Bullet Tweeters

Model	Size	Power RMS/Peak	Impedance
MT1	1.5" VC	60/300W	4 Ohm
T35	25.5mm	30/60W	4 Ohm
T40	35mm	60/120W	4 Ohm
T45	38.5mm	45/180W	4 Ohm
T50	44mm	120/300W	8 Ohm

