MASSIVE
2016-17
HIGH PERFORMANCE AUDIO
MASSIVE

ABOUT MASSIVE

Since 1999 Massive® has been an industry leader in high performance audio products. Massive Audio laid its roots in high quality audio reproduction through in-house engineering and a dedication to customer satisfaction.In today's industry, aftermarket products need to excel not only in their ability to reproduce the dynamics of music accurately, but also in their ability to integrate within the confines of the modern environment. In anticipation of such needs, Massive Audio has an array of outstanding products designed for the enthusiast who will not accept any compromise, yet recognizes true value.Our products are the result of years of experience in engineering, manufacturing and an acute understanding of what you, our customers, expect from... "YOUR MASSIVE AUDIO EXPERIENCE."

INDEX

COVER	**1**
ABOUT MASSIVE	2
CATALOGUE	3
SUBWOOFERS	**4**
ECO	5
TKO	6
MMA	7
GTX	8
UFO	9
TOROX	10
SUMMO XL	11
HIPPO XL	12
GORDO	13
AMPLIFIERS	**14**
BLADE	15
EDGE	16
BLU	17
D-BLOCK	18
DRAGO	19
SPEAKERS	**20**
MX	21
MK	22
LX	23
LK	24
PK	25
ZK & XK	26
ACCESSORIES	**27**
CAPS	28
EQ + TRIXO	29
OEM	30
WIRE & REMOTES	31
PRO AUDIO	**32**
M	33
MA & MB	34
MC II	35
MS	36
CLOSED BACK	37
BULLET + CT TWEETERS	38
PAT COMPRESSION DRIVERS	39
HORNS	40
PERSONAL AUDIO	**41**
FLEX HEADPHONES	42
LYNX HEADPHONES	43
AMPLIFIERS SPEC	44
SUBWOOFERS SPEC	45
SPEAEKRS SPEC	46
BACK COVER	47

SUBWOOFERS

GET MASSIVE!

Our name says it all. Massive Audio Subwoofers are made for “Huge Bass with a “Big Bottom”. No matter what style of music you prefer there is a Massive subwoofer to make your heart pound and your ride glide” From our ECO Series to the mega GORDO you will without a doubt hear what you’re looking for when bringing your music to life.

It’s as simple as using high quality materials and thoughtful intelligent assembly. Only the correct part values are selected. The weight of the cones to the winding of the coils; nothing is overlooked. “Precision, Performance & Power”

ECO

Sound Quality Subwoofers

- Heavy Gauge Steel Basket
- High Intensity Grade Y30 Strontium Ferrite Magnets
- Black E-Coated Magnetic Plates for Voice Coil Cooling
- Poly Cotton Spider with Woven Round Tinsel Leads
- Laminated Paper Cones with Pressed Foam Surrounds
- High Impedance Aluminum Former with EISV Voice Coils
- Round Shape PP Vacuum Dust Caps
- Woven Round Tinsel Leads
-6mm Top Plate

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
ECO 12S4	250w / 500w	Single 4	1.5"	40oz	88.2dB

Do you want performance without breaking the bank? With the Massive Audio ECO Series subwoofers you can count on it. Coming in at 88.2dB efficiency and handling up to 500 Watts this sub hits hard at a great price. Made with solid steel baskets, EISV Voice Coils, Woven Round Tinsel Leads and Laminated Paper Cones with red stitching the ECO Series CEA 2031 compliant subwoofers have "Performance That Plays!"

	ECO 12S4
Mounting Depth (A)	5.59 in.
Mounting Diamter (B)	12.09 in.
Mounting cut diameter (C)	10.87 in.
Net weight (Lb)	7.72
Displacement (ft3)	0.9

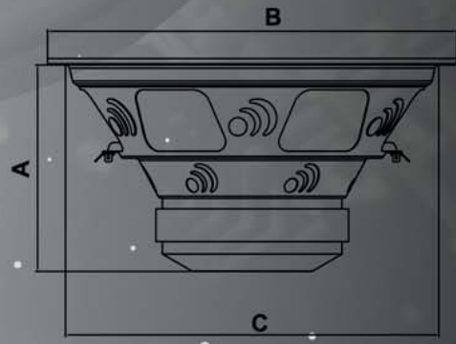

TKO

Sound Quality Subwoofers

- Heavy Gauge Steel Basket
- High Intensity Grade Y30 Strontium Ferrite Magnets
- Black E-Coated Magnetic Plates for Voice Coils Cooling
- Poly Cotton Spiders with Woven Round Tinsel Leads
- Laminated Paper Cones with Pressed Foam Surrounds
- High Impedance Aluminum Formers with EISV Voice Coils
- Round Shape PP Vacuum Dust Caps
- Woven Round Tinsel Leads
- 8mm Top Plate

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
TKO 104	300W/ 600W	Dual 4	2.0'	50oz	87.9dB
TKO 124	300W/ 600W	Dual 4	2.0"	50oz	89.6dB
TKO 12S4	300W / 600W	Single 4	2.0"	50oz	90.1dB

To get a knockout in boxing it takes, training, conditioning, practice, and "timing." To get a TKO with Massive Audio all you have to do is "Get In, Buckle Up and Turn It Up!" The 600 Watt TKO Series subwoofers deliver a knockout leaving the competition cold. TKO Subs are CEA 2031 compliant with steel baskets, foam surrounds with red stitching for added strength and poly cotton spiders with woven round tinsel leads that are all surrounded by powerful Y30 Strontium Ferrite Magnets! No need to count to 10. By unanimous decision the TKO Series is the winner!

	TKO 104	TKO 12S4	TKO 124
Mounting Depth (A)	5.39 in.	5.83 in.	5.83 in.
Mounting Diamter (B)	10.20in.	12.09 in.	12.09 in.
Mounting cut diameter (C)	9.13 in.	10.87 in.	10.87 in.
Net weight (Lb)	8.82	9.92	9.92
Displacement (ft3)	0.9	0.9	0.9



MMA

Sound Quality Subwoofers

- Heavy Gauge Steel Basket
- UV Treated Laminated Paper Cones
- EROM Foam Surrounds with Red Stitching
- 2.5" 4-Layer Hi-Temp Voice Coils
- Round PP Vacuum Dust Caps
- 70oz of High Energy Magnets
- Poly Cotton Spider with Woven Tinsel Leads
- Customized Rubber Gasket
- Dual Impedance Black Anodized Former

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
MMA 104	500w / 1000w	Dual 4	2.5"	70oz	88.3dB
MMA 124	500w / 1000w	Dual 4	2.5"	70oz	88.8dB

The CEA 2031 Compliant MMA Series Subwoofers can gobble up to 1000 Watts! Its 4 layer dual 4 Ohm Hi-Temp Black Anodized Voice Coil are 2.5 inches and are surrounded by powerful 70oz Strontium Ferrite Magnets. 8mm top plates allow for extended excursion with low frequency performance in mind. Then it's all bolted to low resonance Steel Baskets. When it comes to affordable performance and power only MMA subwoofers will hit this hard!

	MMA 104	MMA 124
Mounting Depth (A)	5.67 in.	6.02 in.
Mounting Diamter (B)	10.39 in.	12.28 in.
Mounting cut diameter (C)	9.05 in.	10.79 in.
Net weight (Lb)	10.14	10.58
Displacement (ft3)	0.05	0.08



GTX

Sound Quality Subwoofers

- Heavy Stamped Steel Baskets
- UV Treated Non-Pressed Paper Cones
- EROM Foam Surrounds with Red Stitching
- 2.5" 4-Layer Hi-Temp Voice Coils
- Round PP Vacuum Dust Caps
- 120oz of High Energy Double Stacked Magnets
- Poly Cotton Spider with Woven Tinsel Leads
- Customized Rubber Gasket and Magnet Boots
- Dual Impedance Black Anodized Former
- 5 Way Binding Push Terminals

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
GTX 102	700w / 1400w	Dual 2	2.5"	120oz	89.5dB
GTX 104	700w / 1400w	Dual 4	2.5"	120oz	89.7dB
GTX 122	700w / 1400w	Dual 2	2.5"	120oz	91.3dB
GTX 124	700w / 1400w	Dual 4	2.5"	120oz	92.7dB
GTX 154	700w / 1400w	Dual 4	2.5"	120oz	93.6dB

The CEA 2031 Compliant GTX Series Subwoofers can gobble up to 1400 Watts! Its 4 layer dual 4 Ohm or dual 2 Ohm Hi-Temp Black Anodized Voice Coil are 2.5 inches and are surrounded by powerful double stacked 120oz Strontium Ferrite Magnets. 10mm top plates allow for extended excursion with low frequency performance in mind. Then it's all bolted to low resonance Steel Baskets. GTX Subwoofers have the power and looks to turn heads!

	GTX 104	GTX 102	GTX 124	GTX 122	GTX 154
Mounting Depth (A)	6.34 in.	6.34 in.	6.69 in.	6.69 in.	8.07 in.
Mounting Diamter (B)	10.39 in.	10.39 in.	12.28 in.	12.28 in.	15.35 in.
Mounting cut diameter (C)	9.05 in.	9.05 in.	10.79 in.	10.79 in.	13.62 in.
Net weight (Lb)	15.43	15.43	16.53	16.53	17.64
Displacement (ft3)	0.055	0.055	0.085	0.085	0.153



UFO

Slim Mount / Sound Quality Subwoofers

- Heavy Gauge Steel Basket With Industrial Textured Paining
- High Flux Y30 Strontium Ferrite Magnets
- High Impedance Aluminum 2.5" / 3.0" EISV Voice Coils
- Poly Cotton Spider With Woven Round Tinsel Leads
- Injection PP Cone With Pressed Foam Surrounds
- Shallow Design for Architecture and Automotive
- 5 Way Binding Push Terminals

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
UFO 104	300w / 600w	Dual 4	2.5"	40oz	82.5dB
UFO 124	300w / 600w	Dual 4	3.0"	50oz	84.5dB

When you need Bass but got no Space you can count on the Massive Audio UFO Shallow Mount Series Subwoofers. With mounting depths of 2.95" on the UFO 10 and 3.11" on the UFO 12 a small sealed box can be as tiny as 0.5 Cubic Feet! Their large 3" voice coils can take the 600 Watt CEA2031 power rating while high flux Y30 Strontium Ferrite Magnets help jump the output sensitivity to over 84dB! In a small space or in outer space Massive Audio UFO subwoofers truly deliver an out of this world sound.

	UFO 10	UFO 12
Mounting Depth (A)	2.95 in.	3.11 in.
Mounting Diamter (B)	10.31 in.	12.28 in.
Mounting cut diameter(C)	9.09 in.	10.55 in.
Net weight (Lb)	7.28	10.80
Displacement (ft3)	0.06	0.08

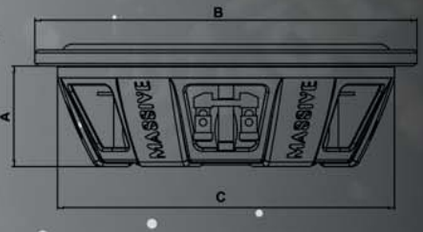

TOROX

High Performance / Sound Quality Subwoofers

- Die Cast Baskets with Black Textured Finish
- Kevlar Fiber Enhanced Non-Pressed Paper Cones
- EROM Foam Surrounds with Red Stitching
- 3.0" 4-Layer Hi-Temp Voice Coils
- Fiberglass Woven Dust Caps
- Enhanced Cooling T-Yoke Design
- 180oz of High Energy Double Stacked Magnets
- Double Black Poly Spiders with Mirrored Layout
- Customized Rubber Gasket and Magnet Boots
- 10 AWG Pure Copper Direct Terminals

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
TOROX 104	1000W/2000W	Dual 4	3"	180oz	86.5dB
TOROX 122	1000W/2000W	Dual 2	3"	180oz	87.3dB
TOROX 124	1000W/2000W	Dual 4	3"	180oz	86.8dB
TOROX 154	1000W/2000W	Dual 4	3"	180oz	88.7dB

Talk about taking the bull by the horn. TOROX Subwoofers can run with staggering two kilos of Power! These CEA 2031 certified subwoofers boast 3" 4 Layer High Temp VC's that ride between triple stacked 180oz magnets. They are then bolted onto a cast aluminum basket with EROM Foam Surrounds that are stitched onto Kevlar Enhanced Non-Pressed Paper cones. Everything bounces with the bass on Double Black Poly Spiders that are all hard wired with 10 AWG 100% Pure Copper speaker wire directly to the woven power tinsel leads. TOROX Subwoofers are the Beasts of car audio!

Dimensions	TOROX104	TOROX122	TOROX124	TOROX154
Mounting Depth (A)	6.10"	6.77"	6.77"	7.91"
Mounting Diameter (B)	10.83"	12.68"	12.68"	15.43"
Mounting Cut Diameter (C)	9.21"	11.14"	11.14"	13.86"
Shipping Weight (lb)	19.4 Lbs	20.3 Lbs	20.3 Lbs	21.6 Lbs
Displacement (ft3)	0.058	0.087	0.087	0.158



SUMMO XL

High Performance / Sound Quality Subwoofers

- Triple Black Poly Cotton Spiders with Mirror Image Layout
- Enhanced Cooling T-Yoke Design with Black Anodized Finish
- Die Cast Basket with Black Textured Finish
- Kevlar Fiber Enhanced Non-Pressed Paper Cones
- 10 AWG Pure Copper Direct Terminals
- Heavy Die-cast Alloy Baskets
- EROM Foam Surrounds with Red Stitching
- Fiberglass Woven Dust Caps
- 225oz of High Energy Double Stacked Magnets
- 3.0" 4-Layer Hi-Temp Voice Coils

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
SUMMO 64	150w / 300w	Single 4	1.5"	48oz	85.3dB
SUMMO 84	300w / 600w	Dual 4	2.0"	90oz	91.4dB
SUMMO XL104	1500w / 3000w	Dual 4	3.0"	225oz	90.7dB
SUMMO XL124	1500w / 3000w	Dual 4	3.0"	225oz	93.6dB
SUMMO XL154	1500w / 3000w	Dual 4	3.0"	225oz	96.0dB

In the ancient Japanese sport of SUMO the rules are simple. When the Gyoji waves his fan; push the other guy out of a big circle. Massive Audio created the "SUMMO" line of subwoofers with the same goal in mind. Summo Series subwoofers play so low and with such a deep center of force that the competition cannot help but to bow out gracefully. Yes Summo are very large, they dominate with their 3000W power handling, can play loud and low and come in sizes down to the amazing 6.5" Summo 64 subwoofer! Make no mistake when it comes to being "Large & Loud" the Massive Audio Summo Subs will put you in the winners circle!

Dimensions	SUMMO 64	SUMMO 84	SUMMO XL 104	SUMMO XL 124	SUMMO XL 154
Mounting Depth (A)	4.76"	5.04"	6.81"	7.48"	8.58"
Mounting Diameter (B)	7.08"	8.54"	10.83"	12.68"	15.43"
Mounting Cut Diameter (C)	5.98"	7.24"	9.21"	11.14"	13.86"
Net Weight (lb)	16.53	24.25	27.75	28.66	29.76
Displacement (ft3)	0.025	0.035	0.065	0.095	0.175



HIPPO XL

Big Bottom / Ultra High Power Subwoofers

- Kevlar Fiber Non-Pressed Paper Cones
- Die Cast Basket with Black Textured Finish
- Stitched at Cones edge for added strength
- EROM Foam Surrounds
- 320oz of Strontium Double Stacked Magnets
- 10 AWG Pure Copper Direct Terminals
- Heavy Die-Cast Alloy Baskets
- Pure Copper Embedded Tinsel Leads
- Reinforced Fiberglass Woven Dust Caps
- Black Anodized 3" Voice Coil Formers
- Custom Tooled Rubber Gasket and Magnet Boots
- Oversized Mirror Image Dual Poly / Nomex Spiders

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
HIPPO 84	500w / 1000w	Dual 4	2.5"	145oz	88.2dB
HIPPO XL122	2000w / 4000w	Dual 2	3.0"	320oz	95.9dB
HIPPO XL 152	2000w / 4000w	Dual 2	3.0"	320oz	97.9dB

Everyone wants "BIG BOTTOM" when it comes to BASS in their ride, Right? Not much is fatter than the Massive Audio CEA 2031 compliant series subwoofers that can "Bass Flash" that Big Bottom with up to 4000 Watts. Aluminum Cast Basket and Double Stacked 320oz Strontium Magnets rest under a large thick Non Pressed Paper Cone that is then bonded to EROM foam surrounds that are double stitched in red around a reinforced fiberglass woven dust cap. Ten gage speaker wire is then hardwired directly into into the dual 3" voice coils connected through flat high temp tensile wire that is stitched into dual spiders! That's how you get a "BIG BOTTOM" in your ride!

	HIPPO 8 4	HIPPO XL 122	HIPPO XL 152
Mounting Depth (A)	5.04"	7.80"	8.90"
Mounting Diameter (B)	8.55"	12.68"	15.43"
Mounting cut Diameter (C)	7.24"	11.14"	13.86"
Net Weight (lb)	16.92	44.09	46.29
Displacment (ft3)	0.045	0.095	0.175



GORDO

Low Frequency / Ultra High Power Subwoofers

- Kevlar Fiber Non-Pressed Paper Cones
- 4 Inch Dual 1 Ohm Voice Coils
- EROM Foam Surrounds
- 450oz Flux Ferrite Y40 Magnets
- 10 AWG Pure Copper Direct Terminals
- Heavy Die Cast Baskets with Black Textured Finish
- Fiberglass Woven Dust Caps
- Pure Copper Embedded Triple Tinsel Leads
- Triple Black Poly Cotton Spiders

MODEL	POWER RANGE	IMPEDANCE	VOICE COIL	MAGNET	SENSITIVITY
GORDO 121	3000w / 6000w	Dual 1	4"	450oz	101.1dB
GORDO 151	3000w / 6000w	Dual 1	4"	450oz	102.2dB
GORDO 181	3000w / 6000w	Dual 1	4"	450oz	104.3dB

The 'MASSIVE MAN' GORDO Series Subwoofers are CEA 2031 compliant and built to be Big, Bad, Beautiful and just perhaps a danger to all mankind. All three GORDO Series model subs use enormous 4" quadruple layered, dual 1 Ohm flat wound aluminum voice coils with Kevlar fiber dust caps and non-pressed paper cones that have stylish red stitching. GORDO is powered with triple stacked 450oz Hi-Flux Ferrite Magnets that bolt to its heavy die-cast aluminum alloy basket. GORDO can shake the world and do it while holding 6000 watts. These subwoofers can really pound out some serious pain so you might need to stop and ask yourself; can I really take it?

Measurements	GORDO 121	GORDO 151	GORDO 181
Mounting Depth (A)	7.71"	8.18"	9.69"
Mounting Diameter (B)	12.79"	15.55"	18.70"
Mounting Cut Diameter (C)	11.22"	13.77"	16.61"
Net Weight (lb)	59.08	60.85	62.39
Displacement (ft3)	0.11	0.19	0.22



Don't Follow The Herd; Be Heard with Massive Audio Amplifiers!

Massive Audio amplifiers are widely known for their high power and small size. Designed and engineered in the USA, Massive amps not only look gorgeous, they provide powerful and efficient output.

With features like built in ATO OEM Integration even the pickiest of audiophiles are drawn to Massive Audio amplifiers for their sound and value. Massive Audio Amplifiers provide speakers and subwoofers with the highest quality playback to your ride the way you want to hear it.

Advanced micro topology allows amp installations in small spaces negating the need to sacrifice power or performance. Massive amplifiers have an array of beautiful chassis to fit your needs and demands.

BLADE

Full Range A/B Multi Channel & Mono Amplifiers

- HPF, LPF, FULL RANGE Crossovers
- Up to 9 Volt input via RCA or High Level speaker leads
- Built-in Noise Rejection Circuitry
- Bass Boost 0dB ~ 12dB @ 45Hz
- Full MOSFET with High Grade Switching
- High Output Power Supply & Dual Output Voltage
- CH 1/2 and CH 3/4 Crossover Select Switch
- -12V Remote Output for external devices
- -Variable Hi or LP Crossover Frequencies Up to or Down from 3K
- RAIL CAP-B ~ 4 FARAD Capacitor (optional)
- ATO ~ DC Offset Auto Turn On with 12V Out
- Mil Spec Double Sided PCB with SMD parts

MODEL	CHANNEL	RMS	MAX	MIX Ω	FREQ.RESPONSE	DIMENSIONS
B500.2	2	80Wx2	500Wx1	2Ω	15Hz~35KHz	2" x 7.1" x 10.7"
B1000.4	4	80Wx4	500Wx2	2Ω	10Hz~35KHz	2" x 7.1" x 12.9"
B1500.4	4	120Wx4	750Wx2	2Ω	10Hz~35KHz	2" x 7.1" x 15.2"
B2000.4	4	150Wx4	1000Wx2	2Ω	10Hz~35KHz	2" x 7.1" x 16.8"
B1000.1	1	455Wx1	1000Wx1	2Ω	15Hz~35KHz	2" x 7.1" x 12.9"
B2000.1	1	500Wx1	2000Wx1	1Ω	15Hz~250Hz	2" x 7.1" x 10.9"
B2000.5	5	160Wx4+600W	2400W	2Ω	15Hz~35KHz	2" x 7.1" x 20.7"

The BLADE Series Amplifiers are designed with our "Price that Plays" motto. Blade amp make CTA 2006 certified power and all but the B2000.1 is Class A/B full range. The built-in OEM line converters found in every model of BLADE use DC off set to activate the ATO (Auto Turn On). The RCA inputs can take high level speaker signal at up to 9 Volts in. BLADE even has a convenient 12V out feature to power up other products and a preparatory docking input for the custom built 4 Farad Rail Capacitor (RAILCAP-B). All Blade crossover adjustments can be programmed as high or low pass @ up to 3 KHz or Band Passed enabling the use with raw drivers. This ensures that no competition can stand up to the BLADE when it comes to features, performance and value.

SHARP TECHNOLOGY

NANO EDGE

Full Range A/B Multi Channel Amplifiers
Full Range Multi Channel Digital Amplifiers
Mono Block Class D Amplifiers
Hybrid A/B + Class D Amplifiers

- Up to 10 Volt input via RCA or High Level speaker leads
- Mil Spec Double Sided PCB with SMD Parts
- Built-in Noise Reduction Circuitry
- Full Mosfet with High Grade Switching Devices
- Regulated Power Supply & Dual Output Voltage (EX46 & EX48)
- CTA Compliant
- Built-in Auto Sensing Turn-On via Hi-Input
- 12v Remote Output for External Devices
- 10X Switching for Hi or Low Pass Frequencies
- 0~12dB Variable Bass Boost
- 1 Band Parametric Equalizer from 30Hz to 120Hz @ 50Hz (E2, E3, & E4)
- Next Gen Advanced 5 Way Protection
- RAIL CAP-E ~ 4 FARAD Capacitor (Optional)

MODEL	CHANNEL	RMS	MAX	MIX Ω	FREQ.RESPONSE	DIMENSIONS
E2	1	800W	1600W	1Ω	10Hz~220Hz	2.1" x 5.9" x 8"
E3	1	1400W	2800W	1Ω	10Hz~220Hz	2.1" x 5.9" x 11.1"
E4	1	2000W	4000W	1Ω	10Hz~220Hz	2.1" x 5.9" x 14.3"
EX2	2	120Wx2	240Wx2	2Ω	10Hz~35KHz	2.1" x 5.9" x 7.3"
EX4	4	100Wx4	400Wx2	4Ω	15Hz~35KHz	2.1" x 5.5" x 9.5"
EX46	4	150Wx4	600Wx2	2/4Ω	15Hz~35KHz	2.1" x 5.5" x 9.1"
EX48	4	200Wx4	800Wx2	2/4Ω	15Hz~35KHz	2.1" x 5.5" x 9.1"
EX5	5	120Wx4+800W	2560W	4Ω/1Ω	20Hz~35KHz	2.1" x 5.5" x 15"

All NANO EDGE Series amplifiers use our world famous Nano Block military spec circuit boards and "N" drive MOSFET power supplies to ensure top performance. Additionally they now have several new cutting edge features like RCA inputs that take low or high level inputs at up to 10 Volts. This built-in money saving OEM line converter is found in every model of our EDGE Series and every model uses a DC Off Set Music Sensing System to activate the ATO (Auto Turn On). Other new precision audio features found in all mono models include, an adjustable 1 band parametric EQ with up to 12 dB bass boost, a switchable 12V Out terminal, a preparatory docking input for the optional custom matching Massive Audio 4 farad rail capacitor. On all 2, 4 & 5 channel amplifier crossovers adjustments there is a X10 switch that enables the amplifiers to be programed as a High Pass or a Low Pass at 3 KHz adjustable up or down or they can be Band-Passed enabling the usage of raw drivers for more output control.

CUTTING EDGE POWER

NANO BLU

Mono Block Digital Amplifiers
Full Range Digital Multi Channel Bluetooth Amplifiers

- Up to 9 Volt input via RCA or High Level speaker leads
- Bluetooth Audio Streaming with BLX2 & BLX4 with Optional UBT1 Dongle
- Rust free aluminum/stainless steel design
- Nickel Plated Correctors and water resistant circuit boards
- 24dB Adjustable LP Crossover 10Hz - 200Hz (BL1)
- 24dB Adjustable Subsonic Filter 10Hz - 50Hz (BL1)
- LPF / FULL / HPF Crossover frequency selections (BLX2, BLX4)
- Nickel Plated Connectors
- SMD Hi-Fi Audio Components
- Dual Sided Mill Spec PCB's
- Remote Gain Control (BL1)
- Optional UR1 Remote Gain Control Available for (BL1)
- 0-12dB Bass Boost EQ from 30Hz – 90Hz (BL1)
- Auto Sensing Music Turn On with Remote Out
- Noise Rejection Circuitry for ultra-clean output
- RAIL-CAP BLX Docking Input (optional capacitor)

MODEL	CHANNEL	RMS	MAX	MIX Ω	FREQ.RESPONSE	DIMENSIONS
BL1	1	800W	1600W	1Ω	10Hz~220Hz	6.75" x 4.25" x 1.6"
BLX2	2	120Wx2	480Wx1	4Ω	10Hz~25KHz	6.50" x 4.25" x 1.6"
BLX4	4	120Wx4	480Wx2	4Ω	10Hz~25KHz	8.50" x 4.25" x 1.6"

All Massive Audio CTA certified NANO BLU Series amplifiers are Bluetooth÷ ready and can measure up to the big boys in power without the girth! NANO BLU amps are only 4.25" Wide X 1.6" Long. The BL1 Mono Block is rated at 800w RMS @ 1 ohm and is only 6.75" long while the BLX2 two channel amp is rated at 120w RMS x 2 @ 4 Ohm and is only 6.50" and the BLX4 four channel is rated at 120w RMS x4 @ 4 Ohm and is only 8.50"!

All BLU amplifiers feature digital platforms and include docking port that support the optional Plug & Play "RAIL-CAP BLX" a 4 farad capacitor that has been custom tooled to cosmetically match the amps heat sink. The BLX2 & BLX4 also support USB which accommodates the optional Massive Audio UBT1 Bluetooth Dongle for audio streaming. Both amplifiers are designed with a line-out to connect to the BL1 or any other amplifier that is not Bluetooth ready. NANO BLU Series can be mounted into small spaces never used before in a mobile environment due to its size, low power consumption and low thermal operation. Plus all BLU circuit boards are sprayed for water resistance and the rust proof stainless steel and aluminum housing will make this amp a hot seller.

BLU STREAMING

Bluetooth®

MASSIVE

D-BLOCK

Mono Block & Full Range Amplifiers

- 24 dB Low Pass Crossovers with an adjustable range of 40Hz - 220Hz (Mono)
- Hi-Pass 18dB Subsonic Filter with a range of 10Hz - 50Hz. (Mono)
- 1 Band Parametric Bass Boost EQ from 30Hz – 80Hz (Mono)
- RCA link for master / slave configuration (Mono)
- LPF / FULL / HPF Crossover frequency selections (Multi CH)
- 2 CH Switch for easy RCA input configurations (Multi CH)
- Adjustable Q Control to adjust the curve of the bass boost (D 8000)
- Clip Limit Switch to control the output level at clipping point (D 8000)
- -6 ~ 12dB Bass Boost EQ from 30Hz - 120Hz (DBX4)
- X11 - X 18 Switch for HPF/LPF/BANDPASS Crossover Freq. Selections (DBX4)
- Full Digital Circuitry for Extreme Heat Protection (DBX4)
- Hi-Level Input via RCA with Auto Sensing Music Turn-On & Remote Out (DBX4)
- Crossover Frequency Auto Matching for Channels 3/4 (DBX4)
- Optional UR1 Remote Gain Control Available

MODEL	CHANNEL	RMS	MAX	MIX Ω	FREQ.RESPONSE	DIMENSIONS
DBX4	4	230Wx4	1000Wx2	2Ω	20Hz~45KHz	2.1" x 6.5" x 9.40"
D800.4	4	120Wx4	480Wx2	2Ω	15Hz~25KHz	2.1" x 6.5" x 10.5"
D2400	1	1200W	2400W	1Ω	10Hz~220Hz	2.1" x 6.5" x 11.2"
D3600	1	1800W	4000W	1Ω	10Hz~220Hz	2.1" x 6.5" x 14.8"
D8000	1	4000W	8000W	0.5Ω	10Hz~220Hz	2.1" x 6.5" x 19.9"

The Digital Block Series Amplifiers are a staple of beauty and power at Massive Audio. These amplifiers provide significant amounts of power in a stylish and surprisingly small heat sink that allow for high class installs that are not just for show. These CTA Certified amplifiers boast Advanced Digital Power Supply Switching, Mil Spec Double Sided PCB's with SMD parts like matched MOSFET "N" Drive outputs and an advanced Six Way Protection. The Nickel Plated Connectors, 18dB Crossovers, 30Hz - Hi-Fi E-Cap Filter; Heavy Duty Power Supply, Noise Rejection Circuit, 2CH/4CH Button, are all mounted inside a beautiful brushed aluminum "finless" heat sink with a milled top plate bolted down with "hex bolts". The four cornered hex bolts unscrew to reveal mounting tubes that allows the installer to bolt down the amp for a razor clean installation. Top it off with a soft blue LED backlit logo the D-Block Series combines "Style, Form, Function and High Performance".

THE CUTTING BLOCK

DRAGO

Extreme Power Class D Amplifiers

- Link 2 DRAGO amps For Up to 10,000 Watts RMS
- Adjustable Low Pass Filter @ 24dB Octave Slope
- 0-180Hz Phase Shift Control
- DC 8.5V - 16V Operating Voltage
- 200mV - 8V (+/-5%) Input Sensitivity
- 10Hz - 60Hz Subsonic Filter
- Remote Gain Control & Included
- >90db Signal To Noise Ratio
- 30Hz~250Hz Low Pass Frequency Crossover
- <1% T.H.D Continuous @ 4 ohm, 100Hz
- 86dB Efficiency @ 4 Ohm, 100Hz

MODEL	CHANNEL	RMS	MAX	MIX Ω	FREQ.RESPONSE	DIMENSIONS
D5K	1	2600W	5000W	1Ω	10Hz~350Hz	2.3" x 9.5" x 17.7"
D6K	1	3000W	6000W	1Ω	10Hz~350Hz	2.3" x 9.5" x 22.0"
D10K	1	5000W	10000W	1Ω	10Hz~350Hz	2.3" x 9.5" x 23.2"

All 3 "Fire Breathing" Class "D" amplifiers from Massive Audio are designed to produce maximum CTA 2006 certified power for the ultimate audio systems with the most efficient and stable power supply ever designed. Weighing in at 5K Max, 6K Max or 10K Max DRAGO amps can handle loads as low as 1 Ohm and deliver "thousands" of RMS power from every DRAGO model. DRAGO is also designed to "Slave" with a second amp and "Double" it's power for even greater output performance. Its power is output is displayed with its Dual 12V power and ground connectors. (D10K only)

FIRE BREATHING POWER

Massive Delivers!

Massive Audio does not make entry level... anything. The same holds true for our coaxial and component speakers despite their competitive pricing. The MX Series speakers are an ideal upgrade to any factory system and are so efficient that they can be powered from your factory radio as well as hold the power of an aftermarket amplifier.

High quality materials and accurate sound reproduction are evident in all models but none as apparent as the ZK Series Component Speakers. ZK Series are the perfect example of model imaging with the ability to take high amounts of current. Massive Audio's PK Series allow you to build a Pro Audio style system without the guesswork of choosing the correct crossovers or tweeters.

Whatever your need or style...

MX
Coaxial Speakers

- Heavy Gauge Steel Basket With Thick Powder Coating
- High Grade Ferrite Magnet (Midrange)
- Custom Rubber Surround with Coated Paper Cone for Power and Protection
- Hard Dome Tweeters - 13mm Ferro Fluid Cooled Dome Tweeters
- Wide Dispersion with built in phase control
- Neodymium Magnets (Tweeters)
- 1-inch / 25-mm KSV Voice Coils
- Threaded Back plate for easy Tweeter Installation
- High-grade Crossover Capacitors with Large-Gauge Inductors
- Phase-Optimized Designed 12dB Crossovers
- Small Footprint of Crossover for Tight Installation Requirements

MX 693

MX 46

MX 57

MX 5

MX 65S

MX 65

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
MX 2	20w / 40w	0.5"	4ohm	90.1dB	200-20KHz	1.12"/1.81"
MX 3	25w / 50w	0.75"	4ohm	91.2dB	160-20KHz	1.59"/2.76"
MX 4	30w /60w	0.75"	4ohm	91.5dB	120-20KHz	1.63"/3.74"
MX 5	40w / 80w	1"	4ohm	90.5dB	80-20KHz	1.95"/4.41"
MX 65	60w / 120w	1"	4ohm	90dB	60-20KHz	2.48"/5.59"
MX 65S	60w / 120w	1"	4ohm	93dB	65-20KHz	1.89"/5.51"
MX 46	40w / 80w	1"	4ohm	90.1dB	95-20KHz	2.13"/4.06x6.1"
MX 57	50w / 100w	1"	4ohm	92.5dB	60-20KHz	2.17"/5.5x8.6"
MX 693	60w / 120w	1"	4ohm	93.6dB	60-20KHz	2.95"/6.5x8.78"

The Massive Audio MX Series Coaxial Speakers have high powered Flux Y30 Strontium Ferrite Magnets that are contained by powered coated steel baskets with the word "MASSIVE" stamped right through the steel. In the center of a MX Series Coax speakers sit a 1" KSV coil that floats on a poly fiber spider. All speakers sizes include soft custom rubber surrounds, laminated paper cones, a phase optimized 12dB crossover with 13mm Ferro Fluid Cooled dome tweeters. The MX coaxial speakers are excellent for audiophiles looking for sound quality and power without breaking the bank.

MK

Speakers / Components

- Custom Rubber Surround with Coated Paper Cone for Power and Protection
- Soft Silk Dome Tweeters for increased power handling & natural response
- Small Footprint of Crossover for Tight Installation Requirements
- High-grade Crossover Capacitors with Large-Gauge Inductors
- Heavy Gauge Steel Basket With Thick Powder Coating
- Threaded Back plate for easyTweeter Installation
- Phase-Optimized Designed 12dB Crossovers
- Wide Dispersion with built in phase control
- High Grade Ferrite Magnet (Midrange)
- Neodymium Magnets (Tweeters)
- 1-inch / 25-mm KSV Voice Coils

MK 5

MK 6

M6 R

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
MK 5	130w / 260w	1"	4ohm	93dB	60-20KHz	1.85"/4.41"
MK 6	150w / 300w	1"	4ohm	93dB	50-20KHz	2.48"/5.59"
M6 R	150w / 300w	1"	4ohm	93dB	50-20KHz	2.48"/5.59"

★ M6 R sold as each / bonus buy add-on

MK Series speakers are the result of pushing the limits of our engineer's imagination. Incredible sound quality is achieved in the form of rich lows, powerful mid ranges and smooth highs. The compact and efficient MK6 & MK5 Bass/Mid-Range speaker utilizes an ultra-high-grade ferrite magnet that allows the design to be as much smaller than standard ferrite-driven motors. The MK 5 & 6 Series use smooth sounding silk dome tweeters that use an external "threaded nut & bolt" mounting system which hold the 1" / 25mm Copper VC and powerful neodymium magnets. The external crossover network is built with high-grade components commonly found in systems costing more than twice as much.

LX

Coaxials Speakers

- Heavy Gauge Steel Basket With Thick Powder Coating
- Rugged Construction to Withstand Harsh Mobile Environment
- Two Piece Custom Paintable Metal Grills
- High Flux Y35 Strontium Ferrite Magnet
- Custom Designed Pole Piece for Low Distortion and Sound Quality
- High Temperature 100% Pure Copper Voice Coil
- UV Protected Poly Injection Cone with Butyl Rubber Surround
- Fully Isolated Tinsel Leads to Eliminate Crosstalk
- 20mm Soft Dome Swivel Tweeter
- Built-in 6dB Crossover

LX 4

LX 5

LX 69

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
LX 4	50w / 100w	1"	4ohm	87dB	80-20KHz	2.2"/3.36"
LX 5	60w / 120w	1"	4ohm	92dB	72-20KHz	2.24"/4.4"
LX 6	75w / 150w	1"	4ohm	90dB	58-20KHz	2.49"/5.6"
LX 46	60w / 120w	1"	4ohm	90.7dB	95-20KHz	2.24"/7.38"
LX 57	70w / 140w	1"	4ohm	91.5dB	58-20KHz	2.25"/7.38"
LX 69	80w / 160w	1"	4ohm	90dB	70-20KHz	3.4"/8.4"

LX Series speakers combine graceful dynamics with true value for today's industry demands. LX coaxial speakers provide some of the best quality available in a full range speaker system for today's money and are designed to be easily installed in most modern vehicles handling from 40-160 Watts. All models use crystal clear German Silk Soft Dome Swivel Tweeters, in-line high pass filter and auto tweeter protection is directly hard wired. Other features include heavy gauge stamped steel / low resonance composite baskets, high flux Y35 strontium magnets, pure copper voice coils, fully isolated tinsel leads to eliminate unwanted cross talk, UV protected poly injected cones, butyl rubber surrounds and custom two piece paintable grills.

LK

Component Speakers

- 20mm Soft Dome Directional Tweeter with Multi Mounting
- Heavy Gage Steel Baskets with Thick Powder Coating
- High Flux Strontium 5.4 oz Ferrite Magnet
- High Temperature Voice Coils
- UV Poly Injection Cone with Butyl Rubber Surround
- Fully Isolated Tinsel Leads
- Competition Grade 12dB Crossover

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
LK 6	80w / 160w	1"	4ohm	90dB	58-20KHz	2.49"/2.6"

LK Series Component Speakers combine graceful dynamics with true value for today's industry demands. The LK 6 can handle up to 160 Watts Max power and uses crystal clear 20mm German silk soft dome swivel tweeters with a multi-mounting hardware system. An inline 12dB octave high pass filter is directly hard wired to the tweeter to allow for a flexible installation. Features include; Heavy gauge stamped steel / low resonance composite baskets, high flux Y35 strontium magnets, pure copper voice coils, fully isolated tinsel leads to eliminate unwanted cross talk, UV protected poly injected cones, butyl rubber surrounds and custom two piece paintable grills to assure Value, Quality and Performance in one complete system.

PK

Pro Audio Shallow Mount Component Kit

- Custom Cast Aluminum Basket with Thick Powder Coating
- Custom Competition Grade 6 dB Crossover with Massive Logo
- Two piece custom paintable metal grills
- Ultra shallow mounting depth fit for all vehicle system
- Laminated paper cone with cloth surround
- High quality cloth spider with polyester fiber
- 1.5" High temperature TILL voice coil
- Fully isolated tinsel leads to eliminate crosstalk
- 25mm Aluminum Bullet Tweeter with Ferro Fluid Cooled V.C.
- High Grade Ferrite Magnet

MODEL	POWER RANGE	V. C.	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
PK 6S	250w / 500w	1.5"	4ohm	100dB	100-20KHz	1.99"/5.63"

The 12 Volt Pro Audio PK6S shallow mount components are the result of watching and listening to the "Beat from the Street". Massive has tapped into the new pulse of the 12 Volt Pro scene by combining old school car audio elements with current trends. At just under a 1.99" mounting depth the PK6S driver can mount into shallow locations that the majority of other drivers cannot. Its Custom Cast Aluminum Basket, Competition Grade 12 dB Crossover with cloth surround Laminated paper cones and polyester fiber spider hold the 250 watt oversized 1.5" high temp voice coils that are surrounded by high grade Ferrite Magnets. The crystal 25mm Aluminum Ferro Fluid Cooled Tweeter uses a large external threaded nut & bolt through a hole system for flexible mounting. Normally you would need to buy all the components needed separately to install a 12 Volt Pro system. With the PK6S you are ready to rock out of the box!

ZK & XK

High Quality Component Speakers

- Custom Cast Aluminum Baskets With Thick Powder Coating
- High-Energy Y40 Magnets
- High Sensitivity and Accurate Sound Reproduction
- Two Piece Custom Paintable Metal Grills
- Woven Fiber Coating Paper Cone With Butyl Rubber Surround
- High Quality Nomex Spider
- 1.25" High Temperature KSV Voice Coil
- 25 mm Silk Diaphragm Tweeters with Ferro Fluid Cooled V.C.
- Custom Competition Grade 12 dB Crossover With MASSIVE Logo

XK 6

ZK 6

Z6 R

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
ZK 6	200w / 400w	1.25"	4ohm	93dB	50-20KHz	2.56"/5.75"
XK 6	200w / 400w	1.25"	4ohm	90.3dB	40-20KHz	2.5"/5.75"
Z6 R	200w / 400w	1.25"	4ohm	93dB	50-20KHz	2.56"/5.75"

★ Z6 R sold as each / bonus buy add-on

Warm Deep Bass, Powerful "Rim Smacking" Midrange and Silky Smooth Highs best describes the Massive Audio ZK 6 component speakers. Their 25mm Silk Dome Ferro Fluid cooled tweeters use an external easy to use "threaded nut & bolt" mounting system. The cast power coated aluminum baskets holding Nomex Spiders bonded to Woven Fiber Paper Cone surrounded by soft Butyl Rubber let you know you that you are in for the ride of your life! All of this technology can be powered with up to 400 Watts due to the high powered Y40 Magnets. All ZK6 drivers are filtered by High Powered Competition Grade 12 dB Crossovers. Look no further! Installers and consumers alike all praise Z Series as Massive Audio's best component speakers due to their SPL and accurate sound reproduction.

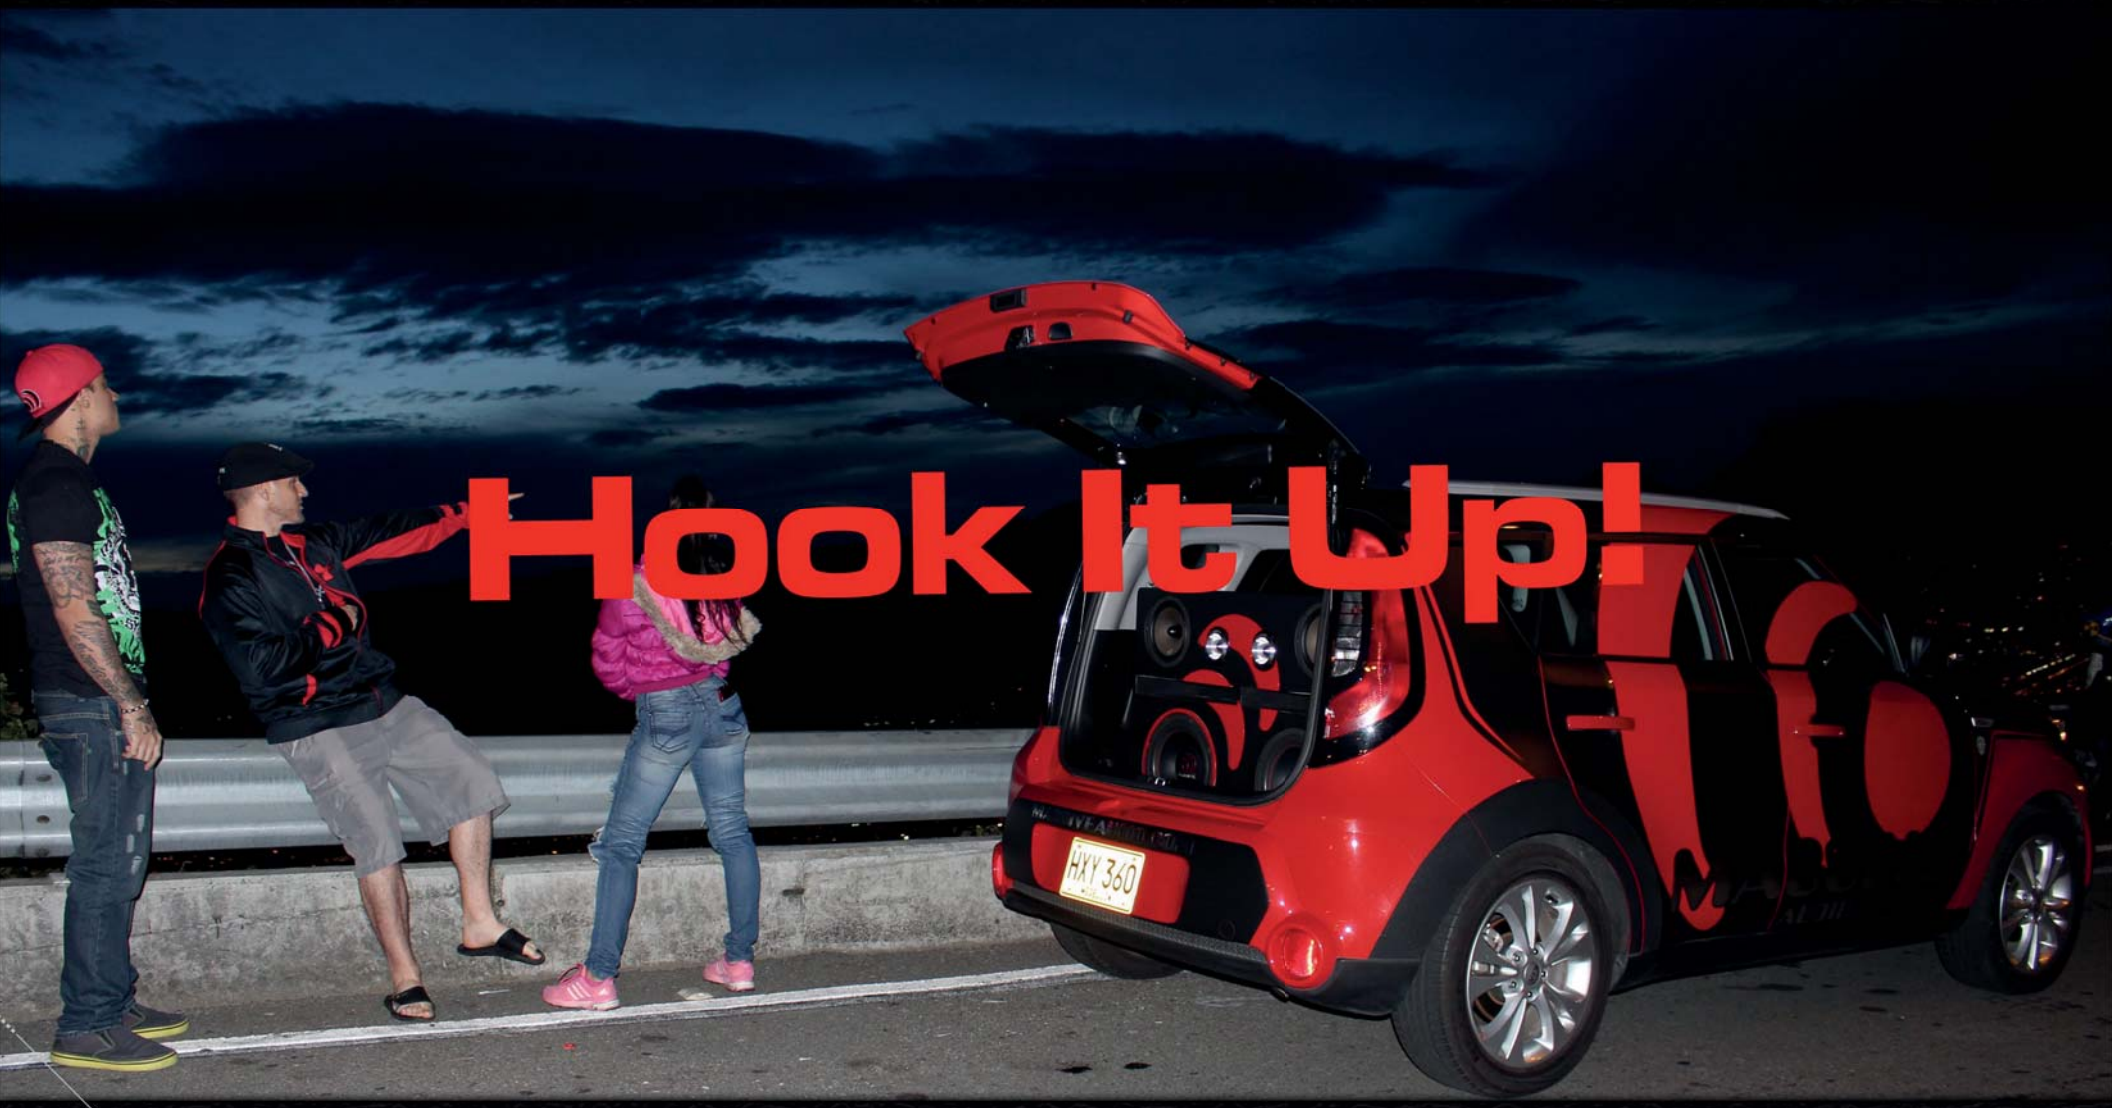

Hook It Up!

You have the perfect speakers, amps and other components for your ideal install. Now you just need to "Hook It Up!" Don't panic, Massive Audio has you covered with an array of necessary accessories that enable you to easily complete the job in style with a level of quality that you can trust will not damage your equipment.

CAPS

Custom Rail Capacitors

Massive Audio Rail Capacitors are custom tooled to perfectly match each series of amplifiers we make. These custom capacitors have a built in connector that plugs directly into the coordinating amplifier for a clean hassle free install. Our CAP 4 is a universal CAP with voltage LED's that can be connected to any brands amplifier. Massive CAPS have an industry low ESR and provide lighting fast power transfer to prevent clipping due to lack of constant current from battery to amplifier.

RAILCAP-E

CAP 4

RAILCAP-B

CAP 4: 4 FARAD CAPACITOR, 3 DIGIT LED DISPLAY FOR VOLATGE MONITORING

RAILCAP-X: CAPACITOR BOOSTER, CUSTOM TOOLED FOR THE DBX4 AMPLIFER

RAILCAP-B: CAPACITOR BOOSTER, CUSTOM TOOLED FOR THE BLADE SERIES AMPLIFERS

RAILCAP-E: CAPACITOR BOOSTER, CUSTOM TOOLED FOR THE NANO EDGE SERIES AMPLIFERS

RAILCAP-BLX: CAPACITOR BOOSTER, CUSTOM TOOLED FOR THE NANO BLU SERIES AMPLIFERS

EQ7 & TRI-XO
EQ'S / CROSSOVERS

- 1/2 DIN
- 7 band Graphic Equalizer
- 8v Line Driver
- Auxiliary inputs
- 6-Channel / 7 Volt RCA Outputs (Front/Rear/Subwoofer)
- Adjustable Master Volume Level Control
- Adjustable Subwoofer Level Control
- 2-Channel RCA AUX Input with Adjustable Gain
- Selectable 12dB Low-Pass Crossover (60Hz or 90Hz)
- Gold Plated Terminals
- Dimensions: 7"(W) " 1"(H) " 4"(D)

EQ 7

The EQ 7 is a 7 band graphic EQ that will correct peaks and dips in sound characteristics associated with most vehicles" interior that dampens and limits both speaker output and imaging. This unit also has a switch to change the LED color from red to blue depending on the interior of the vehicle.

The TRI-XO has been designed with infinitely adjustable asymmetrical electronic crossovers that can multiply frequency crossover points at a slope rate of 18dB per octave using a 3 order Butterworth design. With the infinitely selectable crossover points, system settings become an art of precision. There are three sets of RCA inputs and three sets of 5V outputs with a selectable 180? Phase switch. Engaging the parallel input feature can reduce the number of RCA source outputs while the supplied under dash remote bass gain can boost output @ 50Hz up to 12dB.

TRI-XO

- 3-Way electronic crossover with sub control
- Infinitely adjustable asymmetrical crossovers
- 14.4 Volts DC negative ground power source
- 0.5 Amp Max Input Current
- 0.01% THD @ 1V Output Level
- 10Hz - 30KHz -3dB
- 60dB Separation
- 10dB Per Octave 3rd Order Butterworth X-Over
- 20K Ohm Input Impedance
- 100 Ohm Output Impedance
- 1:2 (+6dB) Output Gain
- 5V Max Output Voltage Level 180 Degree Phase Switch
- Dims ~ 5.98" x 7.08" x 1.69"
- Under Dash Bass Remote 50Hz up to 12dB

OEM INTEGRATION

The B-LYNX OEM Four Channel line converter with BT Audio Streaming can take (4) RCA IN or (4) Speaker Level IN. It can also input streaming audio from a wireless source with the use of the optional UBT-1 Flexible Dongle. The B-LYNX has (4) RCA outputs front & rear at up to 5V out. Powering up the B-LYNX can be accomplished with (3) different options of easy install set up and all 3 engage the 12V out turn on terminal. You can choose DC Offset if the car's head unit has no 12V remote out and regardless of constant output you can select the setting that will automatically turn on/off the device.

- Bluetooth+Audio Streaming with Optional UBT1 Dongle
- Super wide frequency response (10Hz - 80KHz)
- Low working current to reduce power loss
- 4 channel speaker level to RCA conversion
- DC Offset / Audio Turn-On selection
- LED Indicators to indicate functions
- Wide operating voltage (9-16VDC)
- High to Low output level selection
- Stable Turn-On circuit design
- High remote output current
- Bluetooth Turn-On selection
- 5V Max output level (RMS
- 2 / 4 Input mode selection
- Low distortion

B-LYNX

UBT 1

Massive also has a 2-Channel Hi-Low converter that is ideal for adding a subwoofer to your personal ride or a lease car without giving up factory features.

- Balanced Left/Right Matched Inputs
- Remote 12 Volt External Turn On
- Dual L/R Balanced 4.5 Outputs
- Small Design for Easy Mounting
- Music Signal Sensing Turn On
- Ground Noise Isolation
- Plug & Play Installation
- Compact Housing

WIRE & REMOTES

Wirekits / Universal remotes

Protect your investment! AK & G Series Premium "Hook Up's" are the Massive Audio solution to eliminating the weak link. Massive Audio wiring kits greatly simplify the process of installing your amplifier by providing everything you need right in one kit. Unlike most manufacturers we supply all the necessary wire, fuses and terminals in one package. All Massive wire is comprised of Oxygen Free Pure Copper Cable (No Mixed Metal or CCA) and the signal cables use custom molded RCA plugs insuring the highest conductivity. The AK8 and AK 4 supply all necessary power wiring accessories for competition quality installation of a single amplifier; including a pre-wired waterproof fuse holder and remote turn-on wire.

MODEL	POWER/GROUND	SPEAKER	TURN ON	RCA	FUSE
AK 4	4 AWG	16AWG	18AWG	17 FT.	150A
AK 0	0 AWG	16AWG	18AWG	17 FT.	300A
G 8	8 AWG	16AWG	18AWG	17 FT.	60A
G 4	8 AWG	16AWG	18AWG	17 FT.	150A

- 100% Pure Oxygen Free Wire (CEA Certified)
- 17 Ft OFC Directional 2-CH RCA Signal Cables
- 16 Ft Flexible Power Cable
- 3 Ft Flexible Ground Cable
- 20 Ft 16 AWG Speaker Cable
- 17 Ft 18 AWG Remote Signal Wire
- Nickel Plated Inline Fuse Holder
- 2 Nickel Plated Ring Terminals
- 2 Nickel Plated Spade Terminals
- Butt Connectors
- Cable Ties

G 4

- 3 Ft Heat Treated Flexible Ground Cable With Protective Mesh
- 17 Ft OFC Directional 2-CH RCA Signal Cables
- Nickel Plated Water Proof Inline Fuse Holder
- Twisted Wire For Maximum Strand Count
- 100% Pure Oxygen Free (CEA Certified)
- 16 Ft Heat Treated Flexible Power Cable
- 17 Ft 18 AWG Flexible Remote Signal Wire
- Silver Tinned For Better Connectivity
- 6 Nickel Plated Spade Terminals
- 4 AWG Snap Black Grommets
- 20 Ft 16 AWG Speaker Cable
- 2 Nickel Plated Ring Terminals
- Cable Ties

AK 4

Complete your hook-up with an amplifier gain remote. The Massive UR-1 Gain Remote Knob will allow you to control your woofer output channel from the drivers chair for when you need that quick mute or simply want to reduce your low end output without fussing with your EQ or head units volume controls. Small Dash Mount Single Knob System with 0 - 12dB Sub Amp Gain Control.

UBT 1

UW 1

UR 1

Turn your ride or boat into a mobile dance club with Massive Audio's 12 Volt Professional Series. As one of the innovators of using professional audio products in vehicles we have always been up to speed on what music lovers need out of an IN-CAR outdoor sound experience.

From entry level mid-range speakers to extremely powerful high frequency compression drivers Massive has everything you need at any decibel. The only question is how far do you want to Be Heard?

M

Midrange Speakers

- CCAW Copper Voice Coils
- Kapton Coil Formers
- Vented and Extended Cores
- Stamped Steel Baskets
- Paper Cones
- Flat Foam Surrounds
- Phase Plug Dust Caps (6")
- 38mm Voice Coils
- Ferro Fluid Cooled, Neodymium Magnets
- Built-In High Pass Filters
- Thick Cast Baskets
- Cloth Surrounds

M6

M8

M 10

MODEL	POWER RANGE	V. C.	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
M 6	140w / 300w	1.5"	8ohm	96dB	270-10KHz	2.91"/5.67"
M 8	150w / 300w	1.5"	8ohm	96dB	100-7KHz	3.27"/7.24"
M 10	150w / 350w	2"	8ohm	95dB	54-7KHz	4.1"/10.1"

Massive Audio Professional Grade - High Efficiency, High Power Midrange Speaker designs are a result of years of experience, research and dedication to high performance audio products. Our M Series line of midrange speakers are built to deliver the best quality sound at price points that are sure to make any enthusiast ecstatic. Applications include everything from PA, DJ and Car Audio installations.

MA & MB
Mid Bass Speakers

- CCAW Copper Voice Coils
- Kapton Coil Formers
- Vented and Extended Cores
- Stamped Steel Baskets
- Paper Cones
- Flat Foam Surrounds
- Phase Plug Dust Caps (6")
- 38mm Voice Coils
- Ferro Fluid Cooled, Neodymium Magnets
- Built-In High Pass Filters
- Thick Cast Baskets
- Cloth Surrounds

MA 6

MA 8

MB 6

MB 8

MODEL	POWER RANGE	V. C.	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
MA 6	140w / 280w	1.5"	8ohm	96dB	115-10KHz	2.36"/6.57"
MA 8	150w / 300w	2"	8ohm	96dB	85-8KHz	3.03"/8.23"
MB 6	150w / 300w	2"	8ohm	97dB	115-10KHz	2.64"/6.57"
MB 8	175w / 350w	2"	8ohm	97dB	90-8KHz	3.23"/8.23"

Massive Audio Professional Grade - High Efficiency, High Power Midrange Speaker designs are a result of years of experience, research and dedication to high performance audio products. Our M Series line of midrange speakers are built to deliver the best quality sound at price points that are sure to make any enthusiast ecstatic. Applications include everything from PA, DJ and Car Audio installations.

MC

Midrange/Mid Bass Speakers

- High Density Ferrite Magnets
- Kapton Coil Formers
- Vented and Extended Cores
- Cast Aluminum Baskets
- Reinforced Paper Cones
- Cloth Cone Edges
- Solid Composition Paper Dust Caps

MODEL	POWER RANGE	V. C.	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
MC 8II	200w / 600w	2"	8ohm	98dB	90-5KHz	3.15"/7.28"
MC 10II	400w / 800w	3"	8ohm	99dB	80-4KHz	4.27"/9.09"
MC 12II	400w / 800w	3"	8ohm	99dB	50-4KHz	4.69"/11.06"

Massive Audio's Professional Grade - Ultra Efficient, High Power Mid-Range/Bass Speaker designs are a result of years of experience, research and dedication to professional audio reproduction. Our Pro "MC Series" has that Massive "Built Like a Tank" design. All models use ultra-low resonance cast aluminum baskets, "Sonically Neutral" re-enforced pressed paper and boast of over 800 watt power handling! This assures a pure open projection at staggering 99.4db @ 1 watt @ 1 Meter efficiency. Already making their presence known as the 12 Volt Pro Mid-Range to beat, the MC Series is for the enthusiast that accepts no compromise when it comes to saving space and increasing output.

MS

Midrange Speakers

- Cast Aluminum Baskets
- 1.5" Copper Voice Coils
- Vented & Extended Cores
- Flat Foam Surround Cone Edges
- Heat Sink for Heat Dissipation
- Ultra Shallow 2.4" or 2.8" Mounting Depth
- Kapton Coil Formers
- Neodymium Magnets
- Paper Cones
- Aluminum Phase Plugs

MODEL	POWER RANGE	V. C.	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH/DIA.
M 6S	130w / 300w	1.5"	4ohm	100dB	270-10KHz	1.89"/5.71"
M 8S	140w / 300w	1.5"	4ohm	98dB	100-7KHz	2.4"/7.17"

These speakers along with its M Series brethren are all engineered in the USA to perform at perfectly selected midrange frequencies with high sensitivity to enhance your listening experience. The Slim Series feature special Neodymium Magnets / Aluminum Heat Sinks on the top of the speakers. This adds power handling without adding depth and as an added bonus keeps the voice coils cool for extended playing time. Slim Series speakers are designed to deliver high power and will fit into most any restricted spaces courtesy of their high powered neodymium magnet assembly and low profile mounting for any limited space restrictions! Truly Unique, Definitely Massive!

CLOSED

Closed Back Midrange Component Speakers

- High Grade Ferrite Magnets
- 25mm Copper Voice Coils
- Kapton Coil Formers
- Heavy Gauge Steel Baskets
- Reinforced Paper Cones
- Custom Cloth Surrounds
- Paint able Speakers Gills Included

M 69C

M 57C

M 6C

M 8C

MODEL	POWER RANGE	IMPEDANCE	SENSITIVITY	FREQ. RANGE	DEPTH
M 6C	70w / 280w	8ohm	97dB	570-7KHz	2.9"
M 8C	80w / 300w	8ohm	98dB	550-6KHz	2.8"
M 57C	70w / 280w	8ohm	97dB	570-7KHz	2.5"
M 69C	80w / 280w	8ohm	97dB	570-7KHz	3.4"

Massive Audio's Closed Back Mid-Range Speakers are designed for high SPL without needing an enclosure of any kind. These are your best "bang for your buck" in a mid-range speaker that excels in excellent vocal reproduction. Engineered to cover frequency ranges from 448Hz – 7KHz the Mid-Range Closed Back or Sealed Back Speakers offer clear transparency for systems that need that boost in Mid-Range tone and clarity.

T SERIES SUPER BULLET TWEETERS

High Frequency Transducers

- Neodymium Magnets (CT1, CT1a, CT2II)
- External 12dB Crossovers (CT1, CT1a, CT2II)
- 25mm Silk Soft or Aluminum Dome (CT1, CT1a)
- 28mm Silk Soft Dome (CT2II)
- Flexible Mounting Options including Surface, Angle or Flush Mount (CT1, CT1a, CT2II)
- Swivel Feature for flexible mountings (Ct1, CT1a & CT2II)
- 4 Ohm Impedance

CT 1

CT 1A

T 50

CT 30

CT 2II

CT 4

MODEL	POWER RANGE	VOICE COIL	SENSITIVITY	FREQ. RANGE	TWEETER
CT 1	60w / 110w	25mm	90dB	1.2K-20KHz	SILK
CT 1A	60w / 120w	25mm	92dB	1.3K-20KHz	ALUMINUM
CT 2II	80w / 180w	28mm	91dB	1.4K-20KHz	SILK
★ CT 30	120w / 300w	30mm	91dB	3K-22KHz	SILK
★ CT 4	30w / 120w	51.6mm	100dB	3K-25KHz	ALUMINUM
★ CT 6	60w / 300w	25.4mm	100dB	4K-22KHz	ALUMINUM
★ T 40	30w / 120w	25.5mm	100dB	4K-22KHz	ALUMINUM
★ T 50	60w / 300w	44.4mm	107dB	3K-22KHz	ALUMINUM
★ Sold As Each					

Massive Audio's CT Series are the perfect complement to any high end car audio system. CT Series incorporates Neodymium or Ferrite Magnets and 12dB crossovers. The CT 1a is an aluminum dome while the CT 1, CT2II incorporate pure German Silk Dome Tweeters. CT1, CT1a & CT2II high frequency transducers have an array flexible mounting options including surface or flush mounts while the allows for an easy 4 corner flush mount installation.

PAT

High Frequency Compression Drivers

These Bolt-On & Screw-On compression drivers provide extremely high sound pressure levels with low distortion for better control at high wattage. Our PAT Series come in a number of flavors that range from 50 Watts to an amazing Stadium class 800 Watts Peak. All units feature Titanium Ferro Fluid Cooled Voice Coils and High Grade Ferrite Magnets. The replaceable ultra-durable titanium diaphragms will produce excellent highs for intelligible vocals. Each driver is designed for serious music enthusiasts and will enhance any Pro Audio application that you have in mind. Match them with our Wave Guide Horns and unleash your highs with our PAT Series compression drivers.

PAT 250

PAT 400

PAT 3

PAT 34

PAT 200

MODEL	POWER RANGE	VOICE COIL	IMPEDANCE	SENSITIVITY	FREQ. RANGE	TWEETER
PAT 3	30w / 120w	25.5mm	8ohm	108dB	1.5K-20KHz	1-3/8" Screw
PAT 34	50w / 200w	34.4mm	8ohm	108dB	1.2K-20KHz	1-3/8" Screw
PAT 200	100w / 500w	77.2mm	8ohm	111dB	500-20KHz	2" Bolt
PAT 250	150w / 600w	51.6mm	8ohm	107dB	200-9KHz	1-3/8" Screw
PAT 400	200w / 800w	100mm	8ohm	116dB	300-7KHz	2" Bolt

HORNS

Pro Audio Wave Guides

Massive Audio F Series Horns incorporate an exponential flare for desired sonic transfer and crystal clear reproduction of high frequencies and are tailor made for our PAT Series Compression Drivers. F4 is a 2" Exit, 4-Bolt Mount wave guide that is made from cast aluminum for durable, high performance dispersion and accurate sound reproduction. The aluminum construction also acts as a heat sink to provide additional cooling to high powered drivers. The F4 horns work in conjunction with Massive Audio high power PAT 200 and PAT 400 compression drivers for perfect dispersion of high frequencies for applications from extraordinary "in-car" SPL to large stadiums applications.

The F4 and F5 are 1-3/8" screw-on wave guides that boast excellent off-axis consistency for smooth and clear high frequency reproduction. The F3 & F5 wave guides works in conjunction with the PAT3, PAT 34 and PAT 250 compression drivers.

F4

F3

LoudSpeaker Standard
CEA
CEA-2031 Compliant

MODEL	THROAT	DISPERSION	MATERIAL	MOUNTING
F3	1-3/8"	60 x 40	ABS	Screw-On
F4	2"	45 x 45	Aluminum	Bolt-On
F5	1-3/8"	45 x 45	ABS	Screw-On

FLEX HEADPHONES

LYNX HEADPHONES

High Quality Headphones

FLEX

Wireless High Quality Headphones

Features:

- Carrying bag with MASSVE logo
- Noise rejection circuitry
- Built-in Omni-directional microphone®for phone calls and gaming
- Glossy piano finish with leather ear pads
- Auxiliary In/Out for linking for music sharing
- SUPER BASS button for powerful low frequency or enhanced sound quality
- Multi-Function interface for Volume / Play / Pause / >> / << / Phon e / Power / Mute
- Dual oversized speakers for high performance sound quality
- Mil spec PCB with SMD parts for amplification
- Battery status LED with low battery audio indicator
- USB Rechargeable lithium-ion battery

Specifications:

- Connectivity : Wireless Bluetooth
- Wireless Range: 33 Feet / 10 meters
- Accessories: 1200mm 3.5mm Flat Wire Auxiliary Cable / 800mm Micro-USB Charging Cable
- Dimensions Open: 7.3"H x 7.3"W x 3.1 "D
- Dimensions Folded: 4.7"H x 6.8"W x 3.1 "D
- Battery Life: 30 hours music / 35 hours talk & 1200 hours standby
- Battery: Rechargeable Lithium-ion via Micro USB
- Speakers: 2-Way Dual Oversized High Powered Drivers
- Finish: Glossy Piano Finish with Leather Ear and Head Pads
- Direct Connect / Linking: 3.5mm Auxiliary In/Out
- Microphone: Omni-directional -43db, SNR>60dB
- USB Port: Micro-USB, DC5V, 350-400mA
- Frequency Response: 20Hz - 20KHz
- Tuning: Bass Boost Button For Optional Low Frequency Enhancement
- Sensitivity: 110dB
- Magnet: Neodymium

FLEX Bluetooth Headphones with SUPERBASS are built for comfort, function, style and sound quality. Their leather ear pads and adjustable headband ensures a universal comfortable fit. The built-in noise canceling microphone captures your voice perfectly for gaming or talking on the phone. On board buttons allow you to have full control over music, phone, mute and volume. The rechargeable battery has a 30 hour; of constant music, capacity and is easily charged via USB. You can even share your music with friends via the auxiliary IN & OUT jacks. A variety of colors, smooth piano finish and stylish MASSIVE logos let audiophiles and bass heads sport these cans in style. The oversized speakers produce superb sound quality and even include a SUPERBASS button that will deliver hard hitting bass when you want it. Keep your phone or iPod in your pocket and relax while these headphones do all the heavy lifting and hitting. All headphones fold for travel and come with a MASSIVE carrying bag, USB charging cable and auxiliary cable for music sharing.

Awarded Best Value

LYNX

Wired High Quality Headphones

Features:

- Carrying bag with MASSVE logo
- Noise rejection circuitry
- In-Line Omni-directional microphone®for phone calls
- Glossy piano finish with leather ear pads
- Auxiliary In/Out for linking for music sharing
- Enhanced low frequency tuning quality, excellent for movies and gaming
- Multi-Function interface for Volume / Play / Pause / >> / << / Phone / Power / Mute
- Dual oversized speakers for high performance sound quality
- Mil spec PCB with SMD parts for amplification

Specifications:

- Connectivity: Direct 3.5mm Auxiliary Input / Output
- Accessories: 1200mm 3.5mm Flat Wire Auxiliary Cable / Carry Bag
- Dimensions Open: 7.3"H x 7.3"W x 3.1 "D
- Dimensions Folded: 4.7"H x 6.8"W x 3.1 "D
- Speakers: Dual Oversized High Powered Drivers
- Finish: Glossy Piano Finish with Leather Ear and Head Pads
- Microphone: Omni-directional -43db, SNR>60dB
- Frequency Response: 20Hz - 20KHz
- Sensitivity: 110dB
- Magnet: Neodymium

The MASSIVE Wired Headphones are built for comfort, function, style and sound quality. Their leather ear pads and adjustable headband ensures a universal comfortable fit. The In-Line noise canceling microphone captures your voice perfectly for gaming or talking on the phone. In-Line buttons on tangle free flat wire allow you to have full control over music, phone and volume. You can even share your music with friends via the auxiliary IN & OUT jacks. A variety of colors, smooth piano finish and stylish MASSIVE logos let audiophiles and bass heads sport these cans in style. The oversized speakers produce superb sound quality and deliver hard hitting bass when you want it. Watch movies on your personal device and enjoy the theatre style audio, game out with all the thrills of detailed sound effects or share music with your friends. All headphones fold for travel and come with a MASSIVE carrying bag and auxiliary cable for music sharing.

Best Optimum Value

MASSIVE AUDIO 2016-17 AMPLIFIER SPECIFICATION GRID

MODEL	CH	RMS PWR	RMS PWR	MAX	RMS 4 OHM	RMS 2 OHM	RMS PWR	VARIABLE	VARIABLE	FREQUENCY	FUSE	X	THD	BASS	DIMENSIONS
BLADE		4 OHMS ST	2 OHMS ST	POWER	BR MONO	BR MONO	1 OHM MONO	LOW PASS	HI-PASS	RESPONSE	RATING	OVER		BOOST	
B 500.2	2	80W x 2	160W x 2	500W	320W x 1	-	-	50Hz - 3KHz	50Hz - 3KHz	15Hz - 35KHz	20A	24 dB	<.1%	0-12dB	2.0" x 7.1" x 10.7"
B 1000.4	4	80W x 4	160W x 4	1000W	320W x 2	-	-	50Hz - 3KHz	10Hz - 500Hz	10Hz - 35KHz	20A x 2	24 dB	<.05%	0-12dB	2.0" x 7.1" x 12.9"
B 1500.4	4	120W x 4	240W x 4	1500W	480W x 2	-	-	50Hz - 3KHz	10Hz - 500Hz	10Hz - 35KHz	30A x 2	24 dB	<.05%	0-12dB	2.0" x 7.1" x 15.2"
B 2000.4	4	150W x 4	300W x 4	2000W	600W x 2	-	-	50Hz - 3KHz	10Hz - 500Hz	10Hz - 35KHz	40A X 2	24 dB	<.05%	0-12dB	2.0" x 7.1" x 16.8"
B 1000.1	1	-	-	1000W	-	455W x 1	-	50Hz - 3KHz	-	10Hz - 35KHz	20A x 2	12 dB	<.1%	0-12dB	2.0" x 7.1" x 12.9"
B 2000.1	1	-	-	2000W	-	500W x 1	1000W x 1	80Hz - 250Hz	10Hz - 50Hz	10Hz - 35KHz	40A x 2	12 dB	<.1%	0-12dB	2.0" x 7.1" x 10.9"
B 2000.5	5	80W x 4	160W x 4	2000W	300W x 1	600W x 1	-	50Hz - 3KHz	10Hz - 500Hz	15Hz - 35KHz	80A	24 dB	<.1%	0-12dB	2.0" x 7.1" x 20.7"
NANO EDGE															
EX 2	2	120W x 2	240W x 2	480W	480W x 1	-	-	10Hz-3KHz	10Hz-3KHz	10Hz-25KHz	40A	18 dB	<.05%	-	2.1" X 5.9" X 7.3"
EX 44	4	100W x 4	200W x 4	800W	400W x 2	-	-	10Hz - 3KHz	10Hz - 3KHz	10Hz - 25KHz	40A	18 dB	<.05%	0-12dB	2.1" X 5.9" X 9.5"
EX 46	4	150W x 4	150W x 4	1200W	600W x 2	-	-	10Hz - 3KHz	10Hz - 3KHz	10Hz - 25KHz	60A	18 dB	<.05%	0-12dB	2.1" X 5.9" X 9.1"
EX 48	4	200W x 4	200W x 4	1600W	800W x 2	-	-	10Hz - 3KHz	10Hz - 3KHz	10Hz - 25KHz	80A	18 dB	<.05%	0-12dB	2.1" X 5.9" X 9.1"
EX 5	5	120W x 4	240W x 4	2560W	480W x 2	400W x 1	800W x 1	60Hz - 220Hz	0 - 60Hz	20Hz - 220Hz	100A	18 dB	<.05%	0-12dB	2.1" X 5.9" X 15"
E2	1	-	-	1600W	-	400W x 1	800W x 1	60Hz - 220Hz	0 - 60Hz	10Hz - 220Hz	60A	18 dB	<.03%	0-12dB	2.1" X 5.9" X 8.0"
E3	1	-	-	2800W	-	700W x 1	1400W x 1	60Hz - 220Hz	0 - 60Hz	10Hz - 220Hz	120A	18 dB	<.03%	0-12dB	2.1" X 5.9" X 11.1"
E4	1	-	-	4000W	-	1000W x 1	2000W x 1	60Hz - 220Hz	0 - 60Hz	10Hz - 220Hz	200A	18 dB	<.03%	0-12dB	2.1" X 5.9" X 14.3"
NANO BLU															
BL1	1	-	-	1600W	-	400W x 1	800WX1	50Hz-150Hz	40Hz - 100Hz	10Hz - 220Hz	50A	24 dB	<.03%	-3dB)-12d	6.75" X 4.25" X 1.6"
BLX2	2	120W x 2	240W x 2	480W	480W x 1	-	-	20Hz-300Hz	20Hz-300Hz	10Hz - 25KHz	20A	12 dB	<.03%	0-12dB	6.50" X 4.25" X 1.6"
BLX4	4	120W x 4	240W x 4	960W	480W x 2	-	-	20Hz-500Hz	20Hz-500Hz	10Hz - 25KHz	40A	12 dB	<.03%	0-12dB	8.50" X 4.25" X 1.6"
D-BLOCK															
D 800.4	4	120W x 4	240W x 4	1920W	480W x 2	-	-	50Hz-750Hz	50Hz - 750Hz	15Hz - 25KHz	40A	18 dB	<.15%	-	2.1" X 6.5" X 10.5"
DBX4	4	230W x 4	250W x 4	2000W	500W x 2	-	-	50Hz - 6KHz	20Hz - 6KHz	20Hz - 45KHz	100A	18 dB	<.3%	YES	1.9" X 5.9" X 9.4"
D 2400	1	-	-	2400W	350W x 1	650W x 1	1200W x 1	40Hz - 220Hz	10Hz - 50Hz	10Hz - 220Hz	60A	24 dB	<.15%	YES	2.1" X 6.5" X 11.2"
D 3600	1	-	-	3600W	650W x 1	950W x 1	1800W x 1	40Hz - 220Hz	10Hz - 50Hz	10Hz - 220Hz	80A	24 dB	<.2%	YES	2.1" X 6.5" X 14.8"
D 8000	1	-	-	8000W	950W x 1	1500W x 1	4000W @ .5 Ω	40Hz - 220Hz	10Hz - 50Hz	10Hz - 220Hz	150A	24 dB	<.15%	YES	2.1" X 6.5" X 19.9"
DRAGO															
D 5K	1	-	-	5000W	730W x 1	1440W x 1	2600W x 1	30Hz - 250Hz	10Hz - 60Hz	10Hz - 350Hz	250A	24 dB	<.1%	YES	2.32" X 9.4" X 17.7"
D 6K	1	-	-	6000W	1000W x 1	2000W x 1	3000W x 1	30Hz - 250Hz	10Hz - 60Hz	10Hz - 350Hz	300A	24 dB	<.1%	YES	2.32" X 9.4" X 22"
D 10K	1	-	-	10,000W	1400W x 1	2700W x 1	5000W x 1	30Hz - 250Hz	10Hz - 60Hz	10Hz - 350Hz	400A	24 dB	<.1%	YES	2.32" X 9.4" X 23.2"

*2016 Massive Audio Inc. All rights reserved. All trade names and logos are trademarks or registered trademarks of respective companies listed. Due to constant improvement specifications are subject to change at anytime

MASSIVE AUDIO 2016-17 SUBWOOFER SPECIFICATION GRID

MODEL	RMS	PEAK	IMPEDANCE	SENSITIVITY	MOUNTING	MOUNTING	MINIMUM	MINIMUM	OPTIMIUM	MAGNET	V.C.	X	BASKET
GORDO	POWER	POWER	OHMS	DB	DEPTH (IN)	DIAMETER (IN)	SEALED (FT3)	PORTED (FT3)	PORTED (FT3)	OZ	SIZE	MAX	TYPE
GORDO 121	3000	6000	1 + 1	101.1	7.71	12.79	3.2	NA	2.6	450	4"	15mm	Cast
GORDO 151	3000	6000	1 + 1	102.2	8.18	15.55	4.2	NA	3.4	450	4"	15mm	Cast
GORDO 181	3000	6000	1 + 1	104.3	9.69	18.7	6	NA	5	450	4"	15mm	Cast
HIPPO													
HIPPO 84	500	1000	4 + 4	88.27	5.04	8.55	0.375	0.69	1.1	320	2.5"	13mm	Cast
HIPPO XL 122	2000	4000	2 + 2	95.99	7.59	12.79	1	1.5	2.59	320	3"	15mm	Cast
HIPPO XL 152	2000	4000	2 + 2	97.98	8.27	15.55	2	3.5	4.75	320	3"	15mm	Cast
SUMMO													
SUMMO 64	150	300	4	85.31	4.76	7.08	0.25	0.41	0.75	48	1.5"	9mm	Cast
SUMMO 84	300	600	4 + 4	91.36	5.04	8.54	0.29	0.5	0.75	90	2"	9mm	Cast
SUMMOXL 104	1500	3000	4 + 4	90.72	7.4	10.83	0.77	1	1.46	225	3"	13.5mm	Cast
SUMMO XL 124	1500	2000	4 + 4	93.61	7.87	12.8	1.16	1.8	2.33	225	3"	13.5mm	Cast
SUMMO XL 154	1500	3000	4 + 4	96	8.54	15.55	2.22	2.5	3.47	225	3"	13.5mm	Cast
TORO X													
TOROX 104	1000	2000	4+ 4	86.5	6.1	10.83	0.77	1	1.46	180	3"	14mm	Cast
TOROX 122	1000	2000	2 + 2	87.3	6.77	12.68	1.16	1.8	2.33	180	3"	14mm	Cast
TOROX 124	1000	2000	4 + 4	86.8	6.77	12.68	1.16	1.8	2.33	180	3"	14mm	Cast
TOROX 104	1000	2000	4 + 4	88.7	7.91	15.43	2.22	2.5	3.47	180	3"	14mm	Cast
UFO													
UFO 10	300	600	4 + 4	82.5	2.59	10.31	0.56	0.77	1.07	40	2.5"	8mm	S Steel
UFO 12	300	600	4 + 4	84.5	3.11	12.28	0.833	1	1.56	50	3"	8mm	S Steel
GTX													
GTX 102	700	1400	2 + 2	89.37	6.34	10.39	0.72	0.9	1.4	120	2.5"	10mm	S Steel
GTX 104	700	1400	4 + 4	89.37	6.34	10.39	0.72	0.9	1.4	120	2.5"	10mm	S Steel
GTX 122	700	1400	2 + 2	9.13	6.69	12.28	1.12	1.7	2.2	120	2.5"	10mm	S Steel
GTX 124	700	1400	4 + 4	92.7	6.69	12.28	1.12	1.7	2.2	120	2.5"	10mm	S Steel
GTX 154	700	1400	4 + 4	93.6	15.35	15.35	2.15	2.4	3.4	120	2.5"	10mm	S Steel
MMA													
MMA 104	500	1000	4 + 4	88.3	5.67	10.39	0. 7	0.9	1,4	70	2.5"	8mm	S Steel
MMA 124	500	1000	4 + 4	88.8	6.02	12.28	1.12	1.7	2.2	70	2.5"	8mm	S steel
TKO													
TKO 104	300	600	4 + 4	87.9	5.59	10.12	0.66	1.25	1.6	50	2"	7mm	S Steel
TKO 124	300	600	4 + 4	89.6	5.79	12.2	1.25	1.5	2	50	2"	7mm	S steel
TKO 12S4	300	600	4	90.1	5.79	12.2	1.25	1.5	2	50	2"	7mm	S Steel
ECO													
ECO 12S4	250	500	4	86.2	5.59	12.2	1.25	1.5	2	40	1.5"	7mm	S Steel

*2016 Massive Audio Inc. All rights reserved. All trade names and logos are trademarks or registered trademarks of respective companies listed. Due to constant improvement specifications are subject to change at anytime

***2016 Massive Audio Inc. All rights reserved. All trade names and logos are trademarks or registered trademarks of respective companies listed. Due to constant improvement specifications are subject to change at anytime**

MASSIVE AUDIO 2016-17 SPEAKER SPECIFICATION GRID

MODEL	RMS	PEAK	IMPEDANCE	SENSITIVITY	MOUNTING	MOUNTING	FREQUENCY	MAGNET	V.C.	X	BASKET
MX SEIRES	POWER	POWER	OHMS	DB	DEPTH	DIAMETER	RESPONSE	OZ	SIZE	MAX	TYPE
MX 2	20W	40W	4	90	1.34"	1.81"	120-20KHz		2.75"		S Steel
MX 3	25W	50W	4	85	1.28"	2.76"	99-20KHz		3.5"		S Steel
MX 4	30W	60W	4	90.5	1.61"	3.74"	95-20KHz		4"		S Steel
MX 5	40W	80W	4	90.5	1.95"	4.41"	80-20KHz		1"		S Steel
MX 65	50W	100W	4	90	2.48"	5.59"	60-20KHz		1"		S Steel
MX 65S	50W	100W	4	93	1.89"	5.51"	65-20KHz		1"		S Steel
MX 46	40W	80W	4	90.1	2.13"	4.06x6.1"	95-20KHz		1"		S Steel
MX 57	50W	100W	4	92.5	2.17"	5.5x8.6"	60-20KHz		1"		S Steel
MX 693	60W	120W	4	93.6	2.95"	6.5x8.78"	60-20KHz		1"		S Steel
MK SEIRES											
MK 5	130W	260W	4	93	1.85"	4.41"	60-20Khz		1"		S Steel
MK 6	150W	300W	4	93	2.48"	5.59"	50-20KHz		1"		S Steel
LX SERIES											
LX 4	50W	100W	4	87	2.2"	3.36"	80-20KHz		1"		S Steel
LX 5	60W	120W	4	92	2.24"	4.4"	72-20KHz		1"		S Steel
LX 6	75W	150W	4	90	2.49"	5.6"	58-20KHz		1"		S Steel
LX46	60W	120W	4	90.7	2.24"	7.38"	95-20KHz		1"		S Steel
LX 57	70W	140W	4	91.5	2.25"	7.38"	58-20KHz		1"		S Steel
LX 69	80W	160W	4	90	3.4"	8.4"	70-20KHz		1"		S Steel
LK SERIES											
LK 6	80W	160W	4	90	2.49"	2.6"	58-20KHz		1"		S Steel
PK SERIES											
PK 6S	250W	500W	4	100	1.99"	5.63"	100-20KHz		1.5"		Cast
ZK SERIES											
ZK 6	200W	400W	4	93	2.56"	5.75"	50-20KHZ		1.25"		Cast
XK SERIES											
XK 6	200W	400W	4	90.3	2.7	5.75"	40-20KHz		1.25"		Cast
CT SEIRES											
CT 1	60W	110W	4	90			1.2-20Khz		25mm		NA
CT 1A	50W	120W	4	92			1.3-20Khz		25mm		NA
CT 2 II	80W	180W	4	92			1.4-20KHz		28mm		NA
CT 30	60W	120W	4	93.5			3-20KHz		30mm		NA

*2016 Massive Audio Inc. All rights reserved. All trade names and logos are trademarks or registered trademarks of respective companies listed. Due to constant improvement specifications are subject to change at anytime

**2016 Massive Audio Inc. All rights reserved. All trade names and logos are trademarks or registered trademarks of respective companies listed. Due to constant improvement specifications are subject to change at anytime

MASSIVE®

Due to continuing improvments features and specifications are subject to change without notice. Copyright 2015 Massive Audio Inc. All rights reserved.
Contact us @ 1.323.262.2262 or visit us online at http://www.massiveaudio.com