

WQ3010D

- 12" Subwoofer 500 Watts RMS/1500 Watts Max Dual 4 ohm Voice Coil
- Aluminized Coated Polypropylene Cone Co-polymer Composite High Excursion Surround • Dual Strontium Ferrite Magnet Motor Assembly • Rear Vented Pole Piece
- Precision Stamped Frame



WG3010

- 12" Subwoofer
 300 Watts RMS/900 Watts Max Single 4 ohm Voice Coil
 Aluminized Polypropylene Cone Precision Stamped
 The Composite High Excursion Surround Frame • Co-polymer Composite High Excursion Surround
 • Strontium Ferrite Magnet Motor Assembly • Rear Vented
- Pole Piece



WF2510

- 10" Shallow
- 300 Watts RMS/900 Watts Max Single 4 ohm Voice Coil
- 3" Mounting Depth Aluminized Polypropylene Cone
 Co-polymer Composite High Excursion Surround Rear
 Vented Pole Piece Precision Stamped Frame Strontium
 Ferrite Magnet Motor Assembly



WQ2510D

- 10" Subwoofer 500 Watts RMS/1500 Watts Max Dual 4 ohm Voice Coil
- Aluminized Coated Polypropylene Cone
 Co-polymer Composite High Excursion Surround • Dual Strontium Ferrite Magnet Motor Assembly • Rear Vented Pole Piece
- Precision Štamped Frame



- **WG2510** 10" Subwoofer

- 10° Subwooter
 300 Watts RMS/900 Watts Max Single 4 ohm Voice Coil
 Aluminized Polypropylene Cone Precision Stamped Frame Co-polymer Composite High Excursion Surround
 Strontium Ferrite Magnet Motor Assembly Rear Vented Pole Piece



WF2510D

- 10" Shallow
- Mount Subwoofer
- 300 Watts RMS/900 Watts Max Dual 4 ohm Voice Coil
- 3" Mounting Depth Aluminized Polypropylene Cone
 Co-polymer Composite High Excursion Surround Rear Vented Pole Piece Precision Stamped Frame Strontium **Ferrite Magnet Motor Assembly**

Powered Subwoofer

- SRV314
 Slim Design 6-3/4" Powered Subwoofer
 Dual-Voice Coil 120 Watt High Power Amp
 Maxx Bass Circuit for Virtual Bass Enhancer
- Air Compression Structure with Aluminum Die-Cast Enclosure • RCA Line Level Input/Speaker Level Input • Dual-neodymium Magnet • Wired Remote Control Included



Authorized Dealers Only

- Call your Sales-Rep for Details -

QSeries Speakers


- Titanium Metallized MIPP Cone

• Rubber Surrounds • Digital Ready				
Model	Size	Power RMS/Max	Tweeter	Midrange
SRQ1621S	6-1/2" – 2-Way	55 Watts/250 Watts	3/4" Silk Dome	-
SRQ6932R	6 x 9" – 3-Way	80 Watts/250 Watts	5/16" Dome	1" Silk Dome
SRQ6831C	6 x 8" – 3-Way	60 Watts/300 Watts	5/16" Dome	1" Silk Dome
SRQ1631R	6-1/2" - 3-Way	55 Watts/280 Watts	5/16" Dome	3/4" Silk Dome
SRQ1331R	5-1/4" - 3-Way	55 Watts/280 Watts	5/16" Dome	3/4" Silk Dome
SRO211H	3/4" Tweeter	45 Watts/200 Watts	3/4" Silk Dome	-

GSeries **Speakers**

Common Features:

Mica-Injection Polypropylene Water Resistant Woofer Cone
 Strontium Ferrite Magnet • Metallized PEI Cone Tweeter

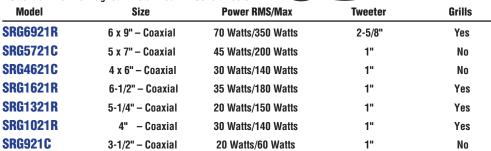

Authorized Dealers Only