



Subwoofers

SXX Subwoofer Series



Common Features:

- Cast Aluminum Basket • Dual Composite 2-Piece Cone • Rugatek Foam Surround
- Wrap Around Rubber Gasket • 3" 8-Layer Aluminum Flat Wire Voice Coil • Triple Stack Magnets

Model	Size	Impedance	Power Handling	Weight
SXX15D4	15"	Dual 4 ohm	1000 Watts RMS	27 lbs.
SXX12D4	12"	Dual 4 ohm	1000 Watts RMS	24 lbs.



SL Subwoofer Series

Common Features:

- Cast Aluminum Basket • Kraft Pulp Cone with Carbon Fibers in Matrix • Rugatek Foam Surround • 4-Layer Aluminum Voice Coil • Wrap Around Rubber Gasket
- Double Stack Magnets

Model	Size	Impedance	Power Handling	Weight
SL12D4	12"	Dual 4 ohm	350 Watts RMS	15.5 lbs.
SL10D4	10"	Dual 4 ohm	350 Watts RMS	14.5 lbs.



SEX Subwoofer Series

Common Features:

- Cast Aluminum Basket • Dual Composite 2-Piece Cone • Wrap Around Rubber Gasket • Rugatek Foam Surround • 3" 4-Layer Aluminum Voice Coil • Triple Stack Magnets

Model	Size	Impedance	Power Handling	Weight
SEX12D4	12"	Dual 4 ohm	600 Watts RMS	21 lbs.
SEX10D4	10"	Dual 4 ohm	600 Watts RMS	20 lbs.



SRX Subwoofer Series

Common Features:

- Pressed Steel Basket • Kraft Pulp Cone • Foam Gasket • Rubber Surround
- 4-Layer Copper Voice Coil • Double Stack Magnets • Linear Spiders

Model	Size	Impedance	Power Handling	Weight
SRX12D4	12"	Dual 4 ohm	300 Watts RMS	15.5 lbs.




REX Subwoofer Series

Common Features:

- Pressed Steel Basket • Santoprene Rubber Surround • Mica Filled Poly Cone
- Foam Gasket • Hi-Temp 8-Layer Copper Voice Coil • Single Magnets

Model	Size	Impedance	Power Handling	Weight
REX12D4	12"	Dual 4 ohm	175 Watts RMS	7 lbs.
REX10D4	10"	Dual 4 ohm	175 Watts RMS	6.5 lbs.
REX8D4	8"	Dual 4 ohm	175 Watts RMS	6 lbs.



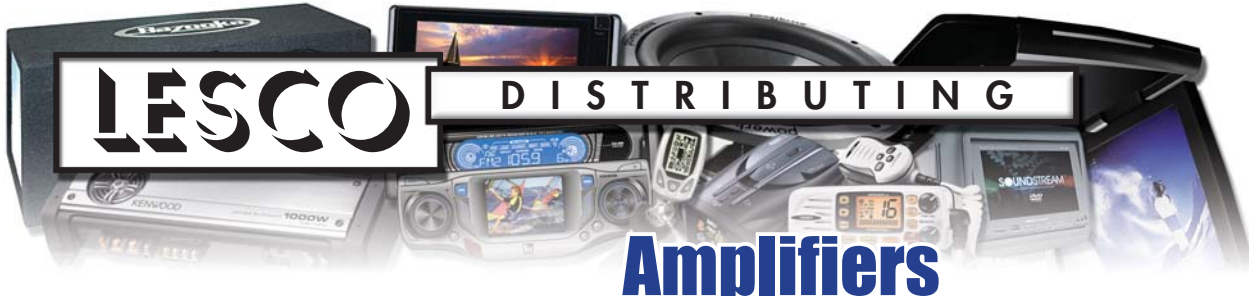

LESCO DISTRIBUTING

Amplifiers

XTV3 Amplifier Series

Common Features:

- Aluminum Heatsink • Subsonic Filter • Variable Crossover Control • Variable Bass EQ




Model	Channels	4Ω RMS	2Ω RMS	Bridged @ 4Ω RMS	Max Power
XT800.V3	2-Class A/B	100W x 2	200W x 2	400W x 1	400W
XT1600.V3	2-Class A/B	200W x 2	400W x 2	800W x 1	800W
XT800.V3	4-Class A/B	700W x 4	120W x 4	230W x 2	400W
XT2000DE.V3	Mono-Class DE	400W x 1	700W x 1	-	1000W
XT4000DE.V3	Mono-Class DE	500W x 1	800W x 1	-	1500W

RE Coaxial Speakers

Common Features:

- Black Silk Polyester Diaphragm • Rubber Surround • 4 ohm Impedance

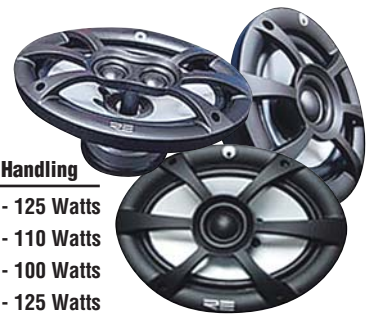

Model	Size	Configuration	Power Handling
RE6.5FR	6.5"	2-Way	100 Watts - 125 Watts
RE6FR	6"	2-Way	100 Watts - 110 Watts
RE5FR	5"	2-Way	75 Watts - 100 Watts
RE5x7FR	5x7"	2-Way	100 Watts - 125 Watts
RE6x9FR	6x9"	3-Way	80 Watts - 100 Watts

RE Tweeter

- 1" (25mm) True Soft Dome Tweeter with Silk Black Polyester Diaphragm • Pure Copper Voice Coil Wire • Hexatech Aluminum Voice Coil Former • Neodymium Magnet • 45 Watts RMS Power Handling • Low-Viscosity Ferro-Fluid Cooling • 4 ohms Nominal Impedance



Bass Mekanik Digital Processor

- Digital Bass Reconstruction Processor • Max Input (VRMS) 5.5vac
- Self Regulating, Oscillating Power Supply • Output Impedance 100k
- Input Impedance 15k • Wired Remote Control

