


LESCO

DISTRIBUTING

WORKMAN Bandit



- VIPER 1** - Gray
- VIPER 2** - Gloss Black
- VIPER 2F** - Flat Black
- CB Antenna w/Unique Snake Skin Appearance
- Eyes Glow in the Dark
- Stainless Steel Whip
- 25,000 Watts Power Handling Capability

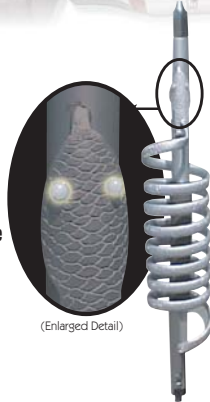

(Enlarged Detail)

- BANDIT2**
- 18' Omni-Directional Tunable Base Station CB/HAM Antenna • 3, 6' Sections & is a 1/2 Wave over 1/4 Wave Design
- Rated at 2000 Watts PEP Power Handling • Pre-tuned for the 11 Meter Band • High-gain Tuning Rings • Mounting Bracket and Hardware included



- TP-8B**
- Quick Disconnect Cable • Polarized Quick Disconnect Bullet
- 8 AWG Leads 2 Pin Positive Grip • 2-Fuse Holders 1 Neg./1 Pos. with 30 AMP Fuses
- 14 Foot Long



- DM-452**
- 5-Pin CB Echo Power Microphone
- Echo Time Control
- Slide Echo Volume Control • Soft Belden Type Microphone Cord
- Built-in Variable Power



- DM507-4**
- 4-Pin Handheld Omni-Directional Dynamic Mic
- 9' Curly Cord
- DM507-5**
- 5-Pin Mic




- CM4**
- Professional Series Handheld CB Microphone
- 4-Pin Cobra/Uniden



- 711**
- Heavy Duty 4" Extension Speaker
- 8 ohm • 10 Watts
- 10' Speaker Cord
- 3.5mm Plug
- Mounting Bracket & Hardware included



- BB3**
- Echo Board Small Type with Plug-in Dual Control (Tornado Echo)



- VR1**
- 24 VDC to 12 VDC Reducer
- 10A Max Output Current
- Over-volt Protection
- Reverse Polarity Protection
- 5.2" W x 2.6" H x 5" D



- PP1**
- Peat/Repeat Unit
- Can Record & Playback any Sound you like



- DS78B**
- Drink Holder Console • CB Radio Plastic Hump Mount with Speaker • External Speaker for CB Radio or Scanner • Speaker Cord with 3.5mm Plug



- FC30BT - Frequency Counter**
- Measures/Receive/Transmit Frequencies
- Press 3 Interval Steps for Dim and Bright Level • Measures Contacted RF Signal or TX Signal from Antenna

- SWR2T**
- SWR/Watt Meter • Checks Antenna Standing Wave and RF • Impedance: 52Ω
- Frequency Range: 1.7 - 30 MHz • Measures SWR: 1:1 to 3:1 • Metal Case Housing
- SO-239 UHF Type Connector

